

BRIZO[®]

KITCHEN

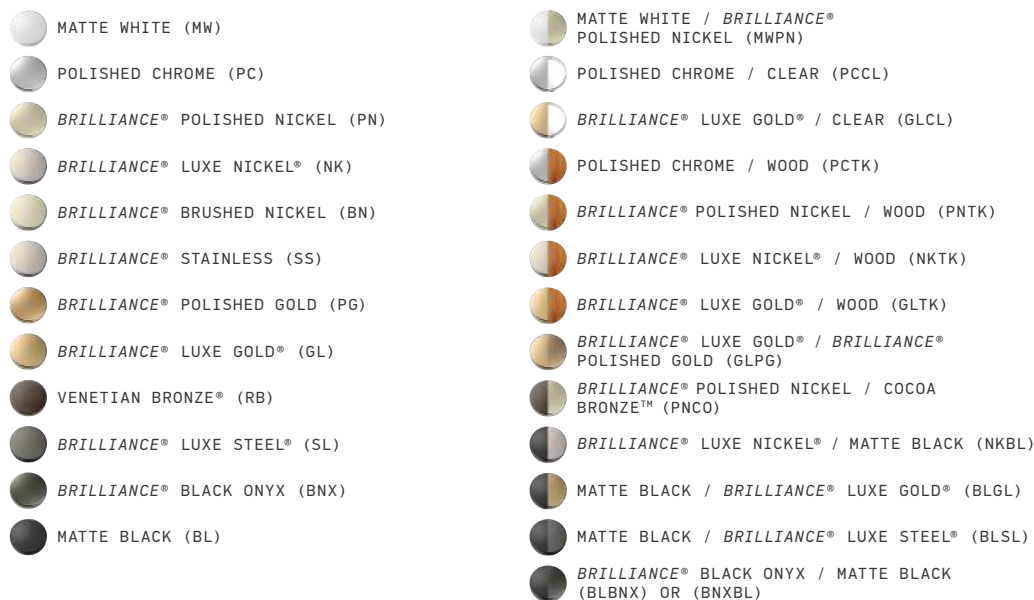
CATÁLOGO 2025



Kitchen Collections



AVAILABLE FINISHES



HANDLE ACCENTS



New Frank Lloyd Wright® Pull-Down Kitchen and Pull-Down Prep Faucets with Square Spouts and Offset Lever Handles in Brilliance® Luxe Gold®

LATEST RELEASES

Ever surprising. Ever inspiring.

Breathtaking new statements. Complements to existing collections. And additional finish offerings across the board. Once again, we've expanded our portfolio with designs sure to inspire your newest vision.



For *the* kitchen

Frank Lloyd Wright® by Brizo® honors the architect's relentless spirit with a host of stylized silhouettes and uncommon accents. The Odin® Kitchen Collection welcomes new additions ranging from **new faucets and handles** to **outdoor offerings**. And the Kintsu® Kitchen Collection grows to include **Polished Nickel** among its finishes.



A LIFE *of*
BEAUTY, ON YOUR
OWN TERMS.



We believe fashion isn't a set of rules to be followed. It's the statement you make as you move through the world, the narrative you shape with every detail of your life. From the clothing you wear to the places you travel, the food you eat—and *yes*, the way you design your home—every detail should live in harmony.

Since our founding over 20 years ago, this philosophy has been our guiding light. We call it *living fashion*: the idea that every choice is an opportunity for self-expression, and every nuance helps tell your story. Because the one thing that can never be copied is staying true to yourself.

REIMAGINING
WHAT CAN BE
and CREATING
WHAT'S NEXT.

Our pioneering spirit doesn't stop at fashion-forward design. We've innovated every facet of the kitchen and bath experience—introducing thoughtfully engineered technologies that make everyday more efficient, more intuitive and ultimately, *more indulgent*.



Innovation *for the* Kitchen

DIAMOND SEAL® TECHNOLOGY

DIAMOND Seal® Technology uses a diamond-coated valve built to last up to 2 times longer than the industry standard (based on ASME 112.18.1 of up to 500,000 cycles).

VOICEIQ® TECHNOLOGY

Voice activation makes your life simpler and easier. Command your faucet to turn on and off, warm up the water, dispense a precise amount or use the innovative handwashing mode.

SMARTTOUCH® TECHNOLOGY

Allowing you to activate water flow with a simple tap to the faucet body, spout or handle, SmartTouch® Technology brings a new level of convenience to the kitchen.

MAGNEDOCK® TECHNOLOGY

The first of its kind available, MagneDock® Technology features a patented, state-of-the-art magnetic docking system to securely hold the spray wand in place when not in use.

ARTICULATING FAUCET

Available with either a finished or exposed hose, the Articulating Faucet offers a larger range of movement than a traditional pull-down faucet.







KITCHEN



ARTESSO® KITCHEN COLLECTION

An industrial evolution.



The artisan tradition has never been more alluring. Tracing its visual inspiration to factories of the early 20th century, the Artesso® Kitchen Collection by Brizo® is a warmer, more refined take on the industrial aesthetic. An array of innovations, including a unique articulating architecture, MagneDock® Technology, and optional SmartTouch® Technology make the collection's functionality every bit the equal of its form.



Available Finishes



POLISHED
CHROME
(PC)



BRILLIANCE®
POLISHED
NICKEL (PN)



BRILLIANCE®
STAINLESS
(SS)



MATTE
BLACK
(BL)



VENETIAN
BRONZE®
(RB)





BRILLIANCE®
LUXE GOLD®
(GL)



KITCHEN FAUCETS

Item	Item No.	Description	
	63025LF-PC	<ul style="list-style-type: none"> • MagneDock® Technology – magnetic docking system • DIAMOND Seal® Technology • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 16 1/8", spout outlet to deck = 8 19/32", spout reach = 8 3/4", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa 	
	63025LF-PN		
	63025LF-SS		
	63025LF-BL		
	63025LF-GL		
	63025LF-RB		
Pull-Down Faucet			
	64025LF-PC	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EPI00854) available for use with connected home devices. • Optional A/C adapter EPI02157 • For additional product details reference the non-SmartTouch® Technology model 	
	64025LF-PN		
	64025LF-SS		
	64025LF-BL		
	64025LF-GL		
	64025LF-RB		
SmartTouch® Pull-Down Faucet			
	63225LF-PC	<ul style="list-style-type: none"> • Dual-jointed articulating arm with semi-flexible hose allows for flexible placement and maneuverability • MagneDock® Technology – magnetic docking system • DIAMOND Seal® Technology • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa 	
	63225LF-PN		
	63225LF-SS		
	63225LF-BL		
	63225LF-GL		
	63225LF-RB		
Articulating Faucet			
	64225LF-PC	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EPI00854) available for use with connected home devices • Optional A/C adapter EPI02157 • For additional product details reference the non-SmartTouch® Technology model 	
	64225LF-PN		
	64225LF-SS		
	64225LF-BL		
	64225LF-GL		
	64225LF-RB		
SmartTouch® Articulating Faucet			


KITCHEN FAUCETS *(continued)*

Item	Item No.	Description	
	63125LF-PC	<ul style="list-style-type: none">• Dual-jointed articulating arm with semi-flexible metal hose allows for flexible placement and maneuverability• MagneDock® Technology – magnetic docking system• DIAMOND Seal® Technology• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa	
	63125LF-PN		
	63125LF-SS		
	63125LF-BL		
	63125LF-GL		
	63125LF-RB		
Articulating Faucet with Finished Hose			

	64125LF-PC	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EPI00854) available for use with connected home devices• Optional A/C adapter EPI02157• For additional product details reference the non-SmartTouch® Technology model	
	64125LF-PN		
	64125LF-SS		
	64125LF-BL		
	64125LF-GL		
	64125LF-RB		
SmartTouch® Articulating Faucet with Finished Hose			



	62525LF-PC	<ul style="list-style-type: none">• Includes matching metal side sprayer• 3-hole installation• Solid brass one-piece waterway• Ceramic cartridges• Overall height = 13 21/34", spout outlet to deck = 10 5/32", spout reach = 8 19/32", spout swivels 360°• Accommodates up to 3" deck thickness• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa	
	62525LF-PN		
	62525LF-SS		
	62525LF-BL		
	62525LF-GL		
	62525LF-RB		
Bridge Faucet with Side Sprayer			

PREP FAUCETS

Item	Item No.	Description
	63925LF-PC	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• DIAMOND Seal® Technology• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 14", spout outlet to deck = 7 3/8", spout reach = 7 9/16", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa
	63925LF-PN	
	63925LF-SS	
	63925LF-BL	
	63925LF-GL	
	63925LF-RB	
Pull Down Prep Faucet		



PREP FAUCETS *(continued)*

Item	Item No.	Description	
	64925LF-PC	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EPI00854) available for use with connected home devices.• Optional A/C adapter EPI02157• For additional product details reference the non-SmartTouch® Technology model	
	64925LF-PN		
	64925LF-SS		
	64925LF-BL		
	64925LF-GL		
	64925LF-RB		
SmartTouch® Pull Down Prep Faucet			



BAR FAUCET

Item	Item No.	Description	
	61025LF-PC	<ul style="list-style-type: none">• 1-hole installation• Ceramic cartridge• Overall height = 13 9/64", spout outlet to deck = 9 1/16", spout reach = 6 1/32", spout swivels 360°• Accommodates up to 2 1/2" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi; 6.81 L/min @ 414 kPa	
	61025LF-PN		
	61025LF-SS		
	61025LF-BL		
	61025LF-GL		
	61025LF-RB		
Bar Faucet			



INSTANT HOT FAUCET

Item	Item No.	Description	
	61325LF-H-PC	<ul style="list-style-type: none">Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO.Delivers near boiling water on demandSelf closing spring loaded ceramic disc valve cartridge1-hole installationOverall height = 9 3/8", spout to deck = 6 3/16", spout reach = 5", spout swivels 360°Accommodates up to 3" deck thicknessMaximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa	
	61325LF-H-PN		
	61325LF-H-SS		
	61325LF-H-BL		
	61325LF-H-GL		
	61325LF-H-RB		
	Instant Hot Faucet		

BEVERAGE FAUCET *(for details on the Pristine™ Tankless Reverse Osmosis System, see pages 84–89)*


Item	Item No.	Description	
	61325LF-C-PC	<ul style="list-style-type: none">• DIAMOND Seal® Technology• Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap• 1-hole installation• Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360°• Accommodates up to 3" deck thickness• Integrated supply tubes• Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa• Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain	
	61325LF-C-PN		
	61325LF-C-SS		
	61325LF-C-BL		
	61325LF-C-GL		
	61325LF-C-RB		
	Beverage Faucet		


POT FILLER

Item	Item No.	Description	
 Wall Mount Pot Filler Faucet	62825LF-PC	<ul style="list-style-type: none"> Two handle wall mount 1-hole installation Cold water only Spout reach = 23 1/4" Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa 	
	62825LF-PN		
	62825LF-SS		
	62825LF-BL		
	62825LF-GL		
	62825LF-RB		

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94–97)*

Item	Item No.	Description
 Soap/Lotion Dispenser	RP75675PC	<ul style="list-style-type: none"> Includes installation hardware Accommodates up to 3" deck thickness 2 3/4" overall height 15-ounce bottle Refillable from above the deck
	RP75675PN	
	RP75675SS	
	RP75675BL	
	RP75675GL	
	RP75675RB	

 Optional Escutcheon	RP71451PN	<ul style="list-style-type: none"> Includes installation hardware Accommodates up to 3" deck thickness 8" on center
	RP71451RB	
	RP71451GL	

 VoiceIQ™ Module	EP100854	<ul style="list-style-type: none"> VoiceIQ® Technology for hands-free voice activation For use with SmartTouch® faucets manufactured after January 2018 Includes VoiceIQ™ module, cable and 9 volt power supply Pairs with Amazon® Alexa® and Google® Assistant-enabled devices Metered and custom dispensing options Warm-up feature pre-heats the water to 95° Handwashing mode using CDC recommended guidelines





KINTSU® KITCHEN COLLECTION

A matter of balance.

Essential, yet evolved. Organic, yet cultivated. Instinctive, yet refined. Contradictions create harmony in the Kintsu® Kitchen Collection by Brizo. Its fluid lines speak to minimalist sensibilities, while crafted touches reflect an artisanal soul. Uniting Japanese and Scandinavian influences, the collection truly embodies the beauty of balance.



Available Finishes



POLISHED CHROME
(PC-L)*



POLISHED NICKEL
(PN-L)*



STAINLESS
(SS-L)*



MATTE BLACK
(BL)



BLACK ONYX
(BNX-L)*




LUXE GOLD®
(GL-L)*

*FEATURES LUMICOAT® TECHNOLOGY

KITCHEN FAUCETS


Item	Item No.	Description
	62506LF-PCLHP-L 62506LF-SSLHP-L 62506LF-BLLHP 62506LF-BNXLHP-L 62506LF-GLLHP-L	<ul style="list-style-type: none">• MagneDock® Technology - magnetic wand docking system• Ceramic cartridge• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 3-hole installation• Overall height = 16 1/8", spout outlet to deck = 9 1/8", spout reach = 9 1/4", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• L = Lumicoat® Technology• Maximum flow rate 1.8 gpm at 60 psi, 6.8l L/min @ 414 kPs• MUST ORDER HANDLES SEPARATELY

	62507LF-PCLHP-L 62507LF-SSLHP-L 62507LF-BLLHP 62507LF-BNXLHP-L 62507LF-GLLHP-L	<ul style="list-style-type: none">• MagneDock® Technology - magnetic wand docking system• Ceramic cartridge• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 3-hole installation• Overall height = 15 15/16", spout outlet to deck = 9 7/8", spout reach = 9 5/16", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• L = Lumicoat® Technology• Maximum flow rate 1.8 gpm at 60 psi, 6.8l L/min @ 414 kPs• MUST ORDER HANDLES SEPARATELY
---	--	---

HANDLE KITS: *Widespread Pull-Down Faucets*


Item	Item No.	Item	Item No.	Description
	HK006-PC-L HK006-SS-L HK006-BL HK006-BNX-L HK006-GL-L		HK007-PC-L HK007-SS-L HK007-BL HK007-BNX-L HK007-GL-L	<ul style="list-style-type: none">• Handles are ADA compliant• Model number = one pair of handles• L = Lumicoat® Technology


KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
	63006LF-PCLHP-L 63006LF-SSLHP-L 63006LF-BLLHP 63006LF-BNXLHP-L 63006LF-GLLHP-L	<ul style="list-style-type: none">• DIAMOND Seal® Technology• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 16 3/16", spout outlet to deck = 9", spout reach = 9 5/16", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• L = Lumicoat® Technology• Maximum flow rate 1.8 gpm at 60 psi, 6.8l L/min @ 414 kPs• MUST ORDER HANDLE SEPARATELY


KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
	64006LF-PCLHP-L	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model
	64006LF-SSLHP-L	
	64006LF-BLLHP	
	64006LF-BNXLHP-L	
	64006LF-GLLHP-L	
SmartTouch® Pull-Down Faucet with Arc Spout - Less Handle		




	63007LF-PCLHP-L	<ul style="list-style-type: none">• DIAMOND Seal® Technology• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles - swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 16 1/8", spout outlet to deck = 10", spout reach = 9 1/8", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• L = Lumicoat® Technology• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs• MUST ORDER HANDLE SEPARATELY
	63007LF-SSLHP-L	
	63007LF-BLLHP	
	63007LF-BNXLHP-L	
	63007LF-GLLHP-L	
Pull Down Faucet with Square Spout - Less Handle		

	64007LF-PCLHP-L	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model
	64007LF-SSLHP-L	
	64007LF-BLLHP	
	64007LF-BNXLHP-L	
	64007LF-GLLHP-L	
SmartTouch® Pull Down Faucet with Square Spout - Less Handle		



PREP FAUCETS

Item	Item No.	Description
	63906LF-PCLHP-L	<ul style="list-style-type: none">• DIAMOND Seal® Technology• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 14 1/16", spout outlet to deck = 7 13/16", spout reach = 7 11/16", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• L = Lumicoat® Technology• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs• MUST ORDER HANDLE SEPARATELY
	63906LF-SSLHP-L	
	63906LF-BLLHP	
	63906LF-BNXLHP-L	
	63906LF-GLLHP-L	
Pull-Down Prep Faucet with Arc Spout - Less Handle		


PREP FAUCETS (continued)


Item	Item No.	Description
	64906LF-PCLHP-L 64906LF-SSLHP-L 64906LF-BLLHP 64906LF-BNXLHP-L 64906LF-GLLHP-L	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157 Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model
SmartTouch® Pull-Down Prep Faucet with Arc Spout - Less Handle		
	63907LF-PCLHP-L 63907LF-SSLHP-L 63907LF-BLLHP 63907LF-BNXLHP-L 63907LF-GLLHP-L	<ul style="list-style-type: none">• DIAMOND Seal® Technology• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 14 1/16", spout outlet to deck = 7 13/16", spout reach = 7 1/4", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• L = Lumicoat® Technology• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPa• MUST ORDER HANDLE SEPARATELY
Pull-Down Prep Faucet with Square Spout - Less Handle		
	64907LF-PCLHP-L 64907LF-SSLHP-L 64907LF-BLLHP 64907LF-BNXLHP-L 64907LF-GLLHP-L	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model
SmartTouch® Pull-Down Prep Faucet with Square Spout - Less Handle		

HANDLE KITS: Pull-Down and Prep Faucets




Item	Item No.	Item	Item No.	Description
	HLK006-PC-L HLK006-SS-L HLK006-BL HLK006-BNX-L HLK006-GL-L		HLK007-PC-L HLK007-SS-L HLK007-BL HLK007-BNX-L HLK007-GL-L	<ul style="list-style-type: none">• Handles are ADA compliant• L = Lumicoat® Technology
Lever		Knob		

BAR FAUCETS

Item	Item No.	Description
 <p>Bar Faucet with Arc Spout - Less Handle</p>	61006LF-PCLHP-L	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout to deck = 8 7/16", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
	61006LF-SSLHP-L	
	61006LF-BLLHP	
	61006LF-BNXLHP-L	
	61006LF-GLLHP-L	

 <p>Bar Faucet with Square Spout - Less Handle</p>	61007LF-PCLHP-L	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 11 3/8", spout to deck = 8 9/16", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • L = Lumicoat® Technology • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
	61007LF-SSLHP-L	
	61007LF-BLLHP	
	61007LF-BNXLHP-L	
	61007LF-GLLHP-L	

HANDLE KITS: *Bar Faucets*

Item	Item No.	Item	Item No.	Description
 <p>Lever</p>	HLB006-PC-L	 <p>Knob</p>	HLB007-PC-L	<ul style="list-style-type: none"> • Handles are ADA compliant • L = Lumicoat® Technology 
	HLB006-SS-L		HLB007-SS-L	
	HLB006-BL		HLB007-BL	
	HLB006-BNX-L		HLB007-BNX-L	
	HLB006-GL-L		HLB007-GL-L	



INSTANT HOT FAUCETS



Item	Item No.	Description
 <p>Instant Hot Faucet with Arc Spout</p>	61306LF-H-PC-L	<ul style="list-style-type: none"> • Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 5/8", spout to deck = 6 3/16", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • L = Lumicoat® Technology • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 
	61306LF-H-SS-L	
	61306LF-H-BL	
	61306LF-H-BNX-L	
	61306LF-H-GL-L	

INSTANT HOT FAUCETS *(continued)*



Item	Item No.	Description	
 <p>Instant Hot Faucet with Square Spout</p>	61307LF-H-PC-L	<ul style="list-style-type: none"> Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 9 7/16", spout to deck = 6 5/16", spout reach = 5 1/16", spout swivels 360° Accommodates up to 3" deck thickness L = Lumicoat® Technology Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61307LF-H-SS-L		
	61307LF-H-BL		
	61307LF-H-BNX-L		
	61307LF-H-GL-L		

BEVERAGE FAUCETS *(for details on the Pristine™ Tankless Reverse Osmosis System, see pages 84-89)*



Item	Item No.	Description	
 <p>Beverage Faucet with Arc Spout</p>	61306LF-C-PC-L	<ul style="list-style-type: none"> DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5 1/16", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain L = Lumicoat® Technology Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
	61306LF-C-SS-L		
	61306LF-C-BL		
	61306LF-C-BNX-L		
	61306LF-C-GL-L		

 <p>Beverage Faucet with Square Spout</p>	61307LF-C-PC-L	<ul style="list-style-type: none"> DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5 1/16", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain L = Lumicoat® Technology Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
	61307LF-C-SS-L		
	61307LF-C-BL		
	61307LF-C-BNX-L		
	61307LF-C-GL-L		


POT FILLERS


Item	Item No.	Description	
 <p>Wall Mount Pot Filler with Lever Handle</p>	62806LF-PC-L	<ul style="list-style-type: none"> Two handle wall mount 1-hole installation Cold water only L = Lumicoat® Technology Spout reach = 20 1/2" 	
	62806LF-SS-L		
	62806LF-BL		
	62806LF-BNX-L		
	62806LF-GL-L		


POT FILLERS *(continued)*

Item	Item No.	Description	
	62807LF-PC-L	<ul style="list-style-type: none">• Two handle wall mount• 1-hole installation• Cold water only• L = Lumicoat® Technology• Spout reach = 20 1/2"	
	62807LF-SS-L		
	62807LF-BL		
	62807LF-BNX-L		
	62807LF-GL-L		
Wall Mount Pot Filler with Knob Handle			





ACCESSORIES *(for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
	695306-PC-L	<ul style="list-style-type: none">• Includes installation hardware• Accommodates up to 3" deck thickness• 2 3/4" overall height• 15-ounce bottle• Refillable from above the deck• L = Lumicoat® Technology
	695306-SS-L	
	695306-BL	
	695306-BNX-L	
	695306-GL-L	
Soap/Lotion Dispenser		

	690106-PC-L	<ul style="list-style-type: none">• Includes installation hardware• Accommodates up to 3" deck thickness• 8" on center• L = Lumicoat® Technology
	690106-SS-L	
	690106-BL	
	690106-BNX-L	
	690106-GL-L	
Optional Escutcheon		

	EP100854	<ul style="list-style-type: none">• VoiceIQ® Technology for hands-free voice activation• For use with SmartTouch® faucets manufactured after January 2018• Includes VoiceIQ® module, cable and 9 volt power supply• Pairs with Amazon® Alexa® and Google® Assistant-enabled devices• Metered and custom dispensing options• Warm-up feature pre-heats the water to 95°• Handwashing mode using CDC recommended guidelines
VoiceIQ® Module		

HARDWARE

Item	Item No.	Description
 Drawer Knob	699206-PC 699206-BL 699206-BNX 699206-NK 699206-GL	<ul style="list-style-type: none">• Mounting hardware included• All metal construction
 Bin Knob	699207-PC 699207-BL 699207-NK 699207-GL	<ul style="list-style-type: none">• Mounting hardware included• All metal construction
 Drawer Pull	699106-PC 699106-BL 699106-BNX 699106-NK 699106-GL	<ul style="list-style-type: none">• Mounting hardware included• All metal construction• 4" center to center distance
 Bin Pull	699107-PC 699107-BL 699107-BNX 699107-NK 699107-GL	<ul style="list-style-type: none">• Mounting hardware included• All metal construction• 4" center to center distance



LITZE® KITCHEN COLLECTION

Art meets craft.



The Litze® Kitchen Collection by Brizo® melds a clean, contemporary sensibility with a crafted style to strike the perfect balance. With three distinct spout options, a unique articulating architecture and two handle designs, the collection is a true study in form. And carefully chosen touches—including deliberately placed knurling details, MagneDock® Technology and optional SmartTouch® Technology—provide functional benefits while celebrating the beauty of craftsmanship.

Available Finishes



POLISHED
CHROME
(PC)



BRILLIANCE®
POLISHED
NICKEL (PN)



BRILLIANCE®
STAINLESS
(SS)



MATTE BLACK/
BRILLIANCE®
LUXE GOLD®
(BLGL)







BRILLIANCE®
LUXE GOLD®
(GL)

KITCHEN FAUCETS

Item	Item No.	Description	
	63343LF-PC 63343LF-PN 63343LF-SS 63343LF-BLGL 63343LF-GL	<ul style="list-style-type: none">• DIAMOND Seal® Technology• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles - swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 23 3/16", spout outlet to deck = 9 3/4", spout reach = 9 1/4", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs	
	64343LF-PC 64343LF-PN 64343LF-SS 64343LF-BLGL 64343LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature - tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model	
	63344LF-PC 63344LF-PN 63344LF-SS 63344LF-BLGL 63344LF-GL	<ul style="list-style-type: none">• DIAMOND Seal® Technology• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles - swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 23 3/16", spout outlet to deck = 9 3/4", spout reach = 9 1/4", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs	
	64344LF-PC 64344LF-PN 64344LF-SS 64344LF-BLGL 64344LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature - tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model	

KITCHEN FAUCETS *(continued)*

Item	Item No.	Description	
 <p>Pull Down Faucet with Arc Spout and Knurled Handle</p>	63043LF-PC	<ul style="list-style-type: none"> • MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 16", spout outlet to deck = 8 3/8", spout reach = 8 11/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa 	
	63043LF-PN		
	63043LF-SS		
	63043LF-BLGL		
	63043LF-GL		
 <p>SmartTouch® Pull Down Faucet with Arc Spout and Knurled Handle</p>	64043LF-PC	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EPI00854) available for use with connected home devices. • Optional A/C adapter EPI02157 • For additional product details reference the non-SmartTouch® Technology model 	
	64043LF-PN		
	64043LF-SS		
	64043LF-BLGL		
	64043LF-GL		
 <p>Pull Down Faucet with Arc Spout and Industrial Handle</p>	63044LF-PC	<ul style="list-style-type: none"> • MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 16", spout outlet to deck = 8 3/8", spout reach = 8 11/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa 	
	63044LF-PN		
	63044LF-SS		
	63044LF-BLGL		
	63044LF-GL		
 <p>SmartTouch® Pull Down Faucet with Arc Spout and Industrial Handle</p>	64044LF-PC	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EPI00854) available for use with connected home devices. • Optional A/C adapter EPI02157 • For additional product details reference the non-SmartTouch® Technology model 	
	64044LF-PN		
	64044LF-SS		
	64044LF-BLGL		
	64044LF-GL		
 <p>Pull Down Faucet with Square Spout and Knurled Handle</p>	63053LF-PC	<ul style="list-style-type: none"> • MagneDock® Technology – magnetic docking system • Two-function pull-down wand: spray and stream • 1-hole installation • Euro-motion ceramic valve with InnoFlex™ waterways • Overall height = 14", spout outlet to deck = 8 1/2", spout reach = 9", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa 	
	63053LF-PN		
	63053LF-SS		
	63053LF-BLGL		
	63053LF-GL		

KITCHEN FAUCETS *(continued)*

Item	Item No.	Description	
	64053LF-PC 64053LF-PN 64053LF-SS 64053LF-BLGL 64053LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EPI00854) available for use with connected home devices.• Optional A/C adapter EPI02157• For additional product details reference the non-SmartTouch® Technology model	
SmartTouch® Pull-Down Faucet with Square Spout and Knurled Handle			
	63054LF-PC 63054LF-PN 63054LF-SS 63054LF-BLGL 63054LF-GL	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Two-function pull-down wand: spray and stream• 1-hole installation• Euro-motion ceramic valve with InnoFlex™ waterways• Overall height = 14", spout outlet to deck = 8 1/2", spout reach = 9", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa	
Pull-Down Faucet with Square Spout and Industrial Handle			
	64054LF-PC 64054LF-PN 64054LF-SS 64054LF-BLGL 64054LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EPI00854) available for use with connected home devices.• Optional A/C adapter EPI02157• For additional product details reference the non-SmartTouch® Technology model	
SmartTouch® Pull-Down Faucet with Square Spout and Industrial Handle			
	63063LF-PC 63063LF-PN 63063LF-SS 63063LF-BLGL 63063LF-GL	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Two-function pull-down wand: spray and stream• 1-hole installation• Euro-motion ceramic valve with InnoFlex™ waterways• Overall height = 14 1/8", spout outlet to deck = 8 3/4", spout reach = 8 7/8", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa	
Pull-Down Faucet with Angled Spout and Knurled Handle			
	64063LF-PC 64063LF-PN 64063LF-SS 64063LF-BLGL 64063LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EPI00854) available for use with connected home devices.• Optional A/C adapter EPI02157• For additional product details reference the non-SmartTouch® Technology model	
SmartTouch® Pull-Down Faucet with Angled Spout and Knurled Handle			











KITCHEN FAUCETS *(continued)*

Item	Item No.	Description	
	63064LF-PC 63064LF-PN 63064LF-SS 63064LF-BLGL 63064LF-GL	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Two-function pull-down wand: spray and stream• 1-hole installation• Euro-motion ceramic valve with InnoFlex™ waterways• Overall height = 14 1/8", spout outlet to deck = 8 3/4", spout reach = 8 7/8", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa	
Pull-Down Faucet with Angled Spout and Industrial Handle			
	64064LF-PC 64064LF-PN 64064LF-SS 64064LF-BLGL 64064LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EPI00854) available for use with connected home devices.• Optional A/C adapter EPI02157• For additional product details reference the non-SmartTouch® Technology model	
SmartTouch® Pull-Down Faucet with Angled Spout and Industrial Handle			
	63243LF-PC 63243LF-PN 63243LF-SS 63243LF-BLGL 63243LF-GL	<ul style="list-style-type: none">• Dual-jointed articulating arm with semi-flexible hose allows for flexible placement and maneuverability• MagneDock® Technology – magnetic docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.8 L/min @ 414 kPa	
Articulating Faucet with Knurled Handle			
	64243LF-PC 64243LF-PN 64243LF-SS 64243LF-BLGL 64243LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EPI00854) available for use with connected home devices.• Optional A/C adapter EPI02157• For additional product details reference the non-SmartTouch® Technology model	
SmartTouch® Articulating Faucet with Knurled Handle			
	63143LF-PC 63143LF-PN 63143LF-SS 63143LF-BLGL 63143LF-GL	<ul style="list-style-type: none">• Dual-jointed articulating arm with semi-flexible metal hose allows for flexible placement and maneuverability• MagneDock® Technology – magnetic docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa	
Articulating Faucet with Finished Hose and Knurled Handle			



KITCHEN FAUCETS *(continued)*

Item	Item No.	Description	
 <p>SmartTouch® Articulating Faucet with Finished Hose and Knurled Handle</p>	64143LF-PC	<ul style="list-style-type: none"> SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light Optional voice activation technology (EPI00854) available for use with connected home devices Optional A/C adapter EPI02157 For additional product details reference the non-SmartTouch® Technology model 	
	64143LF-PN		
	64143LF-SS		
	64143LF-BLGL		
	64143LF-GL		
 <p>Articulating Faucet with Industrial Handle</p>	63244LF-PC	<ul style="list-style-type: none"> Articulating arm with 3 joints and semi-flexible hose allows for flexible placement and maneuverability MagneDock® Technology – magnetic docking system Euro-motion Diamond™ Valve with InnoFlex™ waterways Touch-Clean® nozzles – swipe away mineral deposits Two-function wand: spray and stream 1-hole installation Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° Accommodates up to 3" deck thickness Comes with standard fittings Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa 	
	63244LF-PN		
	63244LF-SS		
	63244LF-BLGL		
	63244LF-GL		
 <p>SmartTouch® Articulating Faucet with Industrial Handle</p>	64244LF-PC	<ul style="list-style-type: none"> SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light Optional voice activation technology (EPI00854) available for use with connected home devices. Optional A/C adapter EPI02157 For additional product details reference the non-SmartTouch® Technology model 	
	64244LF-PN		
	64244LF-SS		
	64244LF-BLGL		
	64244LF-GL		
 <p>Articulating Faucet with Finished Hose and Industrial Handle</p>	63144LF-PC	<ul style="list-style-type: none"> Dual-jointed articulating arm with semi-flexible metal hose allows for flexible placement and maneuverability MagneDock® Technology – magnetic docking system Euro-motion Diamond™ Valve with InnoFlex™ waterways Touch-Clean® nozzles – swipe away mineral deposits Two-function wand: spray and stream 1-hole installation Overall height varies with arm position. Maximum height = 21 1/2", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360° Accommodates up to 3" deck thickness Comes with standard fittings Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa 	
	63144LF-PN		
	63144LF-SS		
	63144LF-BLGL		
	63144LF-GL		
 <p>SmartTouch® Articulating Faucet with Finished Hose and Industrial Handle</p>	64144LF-PC	<ul style="list-style-type: none"> SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light Optional voice activation technology (EPI00854) available for use with connected home devices Optional A/C adapter EPI02157 For additional product details reference the non-SmartTouch® Technology model 	
	64144LF-PN		
	64144LF-SS		
	64144LF-BLGL		
	64144LF-GL		



KITCHEN FAUCETS *(continued)*



Item	Item No.	Description	
	62543LF-PC	<ul style="list-style-type: none"> Includes matching side sprayer 3-hole installation Solid brass one-piece waterway Ceramic cartridges Overall height = 15 3/8", spout outlet to deck = 10 7/8", spout reach = 8 1/4", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa Optional decorative center hole cover available RP90934 	
	62543LF-PN		
	62543LF-SS		
	62543LF-BLGL		
	62543LF-GL		
Bridge Faucet with Arc Spout and Knurled Handle			
	62544LF-PC	<ul style="list-style-type: none"> Includes matching side sprayer 3-hole installation Solid brass one-piece waterway Ceramic cartridges Overall height = 15 3/8", spout outlet to deck = 10 7/8", spout reach = 8 1/4", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa Optional decorative center hole cover available RP90934 	
	62544LF-PN		
	62544LF-SS		
	62544LF-BLGL		
	62544LF-GL		
Bridge Faucet with Arc Spout and Industrial Handle			
	62553LF-PC	<ul style="list-style-type: none"> Includes matching side sprayer 3-hole installation Solid brass one-piece waterway Ceramic cartridges Overall height = 13 3/8", spout outlet to deck = 10 7/16", spout reach = 8 9/16", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa Optional decorative center hole cover available RP90934 	
	62553LF-PN		
	62553LF-SS		
	62553LF-BLGL		
	62553LF-GL		
Bridge Faucet with Square Spout and Knurled Handle			
	62554LF-PC	<ul style="list-style-type: none"> Includes matching side sprayer 3-hole installation Solid brass one-piece waterway Ceramic cartridges Overall height = 13 3/8", spout outlet to deck = 10 7/16", spout reach = 8 9/16", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa Optional decorative center hole cover available RP90934 	
	62554LF-PN		
	62554LF-SS		
	62554LF-BLGL		
	62554LF-GL		
Bridge Faucet with Square Spout and Industrial Handle			
	62563LF-PC	<ul style="list-style-type: none"> Includes matching side sprayer 3-hole installation Solid brass one-piece waterway Ceramic cartridges Overall height = 13 1/2", spout outlet to deck = 10 7/8", spout reach = 8 1/4", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa Optional decorative center hole cover available RP90934 	
	62563LF-PN		
	62563LF-SS		
	62563LF-BLGL		
	62563LF-GL		
Bridge Faucet with Angled Spout and Knurled Handle			


KITCHEN FAUCETS *(continued)*

Item	Item No.	Description	
	62564LF-PC	• Includes matching side sprayer	
	62564LF-PN	• 3-hole installation	
	62564LF-SS	• Solid brass one-piece waterway	
	62564LF-BLGL	• Ceramic cartridges	
	62564LF-GL	• Overall height = 13 1/2", spout outlet to deck = 10 7/8", spout reach = 8 1/4", spout swivels 360°	
Bridge Faucet with Angled Spout and Industrial Handle		• Accommodates up to 3" deck thickness	
		• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa	
		• Optional decorative center hole cover available RP90934	











PREP FAUCETS

Item	Item No.	Description	
	63943LF-PC	• DIAMOND Seal® Technology	
	63943LF-PN	• MagneDock® Technology - magnetic wand docking system	
	63943LF-SS	• Euro-motion Diamond™ Valve with InnoFlex™ waterways	
	63943LF-BLGL	• Touch-Clean® nozzles - swipe away mineral deposits	
	63943LF-GL	• Two-function wand: spray and stream	
Pull-Down Prep Faucet with Arc Spout and Knurled Handle		• 1-hole installation	
		• Overall height = 14", spout outlet to deck = 7 15/16", spout reach = 7 1/8", spout swivels 360°	
		• Accommodates up to 3" deck thickness	
		• Comes with standard fittings	
		• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPa	



	64943LF-PC	• SmartTouch® Technology with TempID® feature - tap on/off functionality with temperature indicating LED light	
	64943LF-PN	• Optional A/C adapter EPI02157	
	64943LF-SS	• Optional voice activation technology (EPI00854) available for use with connected home devices	
	64943LF-BLGL	• For additional product details reference the non SmartTouch® Technology Model	
	64943LF-GL		
SmartTouch® Pull-Down Prep Faucet with Arc Spout and Knurled Handle			

	63944LF-PC	• DIAMOND Seal® Technology	
	63944LF-PN	• MagneDock® Technology - magnetic wand docking system	
	63944LF-SS	• Euro-motion Diamond™ Valve with InnoFlex™ waterways	
	63944LF-BLGL	• Touch-Clean® nozzles - swipe away mineral deposits	
	63944LF-GL	• Two-function wand: spray and stream	
Pull-Down Prep Faucet with Arc Spout and Industrial Handle		• 1-hole installation	
		• Overall height = 14", spout outlet to deck = 7 15/16", spout reach = 7 1/8", spout swivels 360°	
		• Accommodates up to 3" deck thickness	
		• Comes with standard fittings	
		• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPa	

PREP FAUCETS *(continued)*

Item	Item No.	Description	
	64944LF-PC	<ul style="list-style-type: none"> SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light Optional A/C adapter EP102157 Optional voice activation technology (EP100854) available for use with connected home devices For additional product details reference the non SmartTouch® Technology Model 	
	64944LF-PN		
	64944LF-SS		
	64944LF-BLGL		
	64944LF-GL		
SmartTouch® Pull-Down Prep Faucet with Arc Spout and Industrial Handle			
	63953LF-PC	<ul style="list-style-type: none"> DIAMOND Seal® Technology MagneDock® Technology - magnetic wand docking system Euro-motion Diamond™ Valve with InnoFlex™ waterways Touch-Clean® nozzles – swipe away mineral deposits Two-function wand: spray and stream 1-hole installation Overall height = 13 1/2", spout outlet to deck = 7 7/8", spout reach = 7 1/16", spout swivels 360° Accommodates up to 3" deck thickness Comes with standard fittings Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs 	
	63953LF-PN		
	63953LF-SS		
	63953LF-BLGL		
	63953LF-GL		
Pull-Down Prep Faucet with Square Spout and Knurled Handle			
	64953LF-PC	<ul style="list-style-type: none"> SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light Optional A/C adapter EP102157 Optional voice activation technology (EP100854) available for use with connected home devices For additional product details reference the non SmartTouch® Technology Model 	
	64953LF-PN		
	64953LF-SS		
	64953LF-BLGL		
	64953LF-GL		
SmartTouch® Pull-Down Prep Faucet with Square Spout and Knurled Handle			
	63954LF-PC	<ul style="list-style-type: none"> DIAMOND Seal® Technology MagneDock® Technology - magnetic wand docking system Euro-motion Diamond™ Valve with InnoFlex™ waterways Touch-Clean® nozzles – swipe away mineral deposits Two-function wand: spray and stream 1-hole installation Overall height = 13 1/2", spout outlet to deck = 7 7/8", spout reach = 7 1/16", spout swivels 360° Accommodates up to 3" deck thickness Comes with standard fittings Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs 	
	63954LF-PN		
	63954LF-SS		
	63954LF-BLGL		
	63954LF-GL		
Pull-Down Prep Faucet with Square Spout and Industrial Handle			
	64954LF-PC	<ul style="list-style-type: none"> SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light Optional A/C adapter EP102157 Optional voice activation technology (EP100854) available for use with connected home devices For additional product details reference the non SmartTouch® Technology Model 	
	64954LF-PN		
	64954LF-SS		
	64954LF-BLGL		
	64954LF-GL		
SmartTouch® Pull-Down Prep Faucet with Square Spout and Industrial Handle			



PREP FAUCETS (continued)

Item	Item No.	Description	
	63963LF-PC 63963LF-PN 63963LF-SS 63963LF-BLGL 63963LF-GL	<ul style="list-style-type: none">• DIAMOND Seal® Technology• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles - swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 14", spout outlet to deck = 7 7/8", spout reach = 7", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs	
Pull-Down Prep Faucet with Angle Spout and Knurled Handle			
	64963LF-PC 64963LF-PN 64963LF-SS 64963LF-BLGL 64963LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature - tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model	
SmartTouch® Pull-Down Prep Faucet with Angle Spout and Knurled Handle			
	63964LF-PC 63964LF-PN 63964LF-SS 63964LF-BLGL 63964LF-GL	<ul style="list-style-type: none">• DIAMOND Seal® Technology• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles - swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 14", spout outlet to deck = 7 7/8", spout reach = 7", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPs	
Pull-Down Prep Faucet with Angle Spout and Industrial Handle			
	64964LF-PC 64964LF-PN 64964LF-SS 64964LF-BLGL 64964LF-GL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature - tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model	
SmartTouch® Pull-Down Prep Faucet with Angle Spout and Industrial Handle			

BAR FAUCETS



Item	Item No.	Description	
 <p>Bar Faucet with Arc Spout and Knurled Handle</p>	61043LF-PC	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout outlet to deck = 8 5/16", spout reach = 6", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa 	
	61043LF-PN		
	61043LF-SS		
	61043LF-BLGL		
	61043LF-GL		
 <p>Bar Faucet with Arc Spout and Industrial Handle</p>	61044LF-PC	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout outlet to deck = 8 5/16", spout reach = 6", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa 	
	61044LF-PN		
	61044LF-SS		
	61044LF-BLGL		
	61044LF-GL		
 <p>Bar Faucet with Square Spout and Knurled Handle</p>	61053LF-PC	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 11 5/16", spout outlet to deck = 8 3/8", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa 	
	61053LF-PN		
	61053LF-SS		
	61053LF-BLGL		
	61053LF-GL		
 <p>Bar Faucet with Square Spout and Industrial Handle</p>	61054LF-PC	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 11 5/16", spout outlet to deck = 8 3/8", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa 	
	61054LF-PN		
	61054LF-SS		
	61054LF-BLGL		
	61054LF-GL		



BAR FAUCETS *(continued)*

Item	Item No.	Description	
	61063LF-PC 61063LF-PN 61063LF-SS 61063LF-BLGL 61063LF-GL	<ul style="list-style-type: none">• 1-hole installation• Ceramic cartridge• Overall height = 11 1/2", spout outlet to deck = 8 3/8", spout reach = 6", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa	
Bar Faucet with Angled Spout and Knurled Handle			

	61064LF-PC 61064LF-PN 61064LF-SS 61064LF-BLGL 61064LF-GL	<ul style="list-style-type: none">• 1-hole installation• Ceramic cartridge• Overall height = 11 1/2", spout outlet to deck = 8 3/8", spout reach = 6", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa	
Bar Faucet with Angled Spout and Industrial Handle			

INSTANT HOT FAUCETS

Item	Item No.	Description	
	61343LF-H-PC 61343LF-H-PN 61343LF-H-SS 61343LF-H-BLGL 61343LF-H-GL	<ul style="list-style-type: none">• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO.• Delivers near boiling water on demand• Self closing spring loaded ceramic disc valve cartridge• 1-hole installation• Overall height = 9 1/16", spout to deck = 5 7/8", spout reach = 5", spout swivels 360°• Accommodates up to 3" deck thickness• Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa	
Instant Hot Faucet with Arc Spout and Knurled Handle			



	61353LF-H-PC 61353LF-H-PN 61353LF-H-SS 61353LF-H-BLGL 61353LF-H-GL	<ul style="list-style-type: none">• Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO.• Delivers near boiling water on demand• Self closing spring loaded ceramic disc valve cartridge• 1-hole installation• Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360°• Accommodates up to 3" deck thickness• Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa	
Instant Hot Faucet with Square Spout and Knurled Handle			



INSTANT HOT FAUCETS *(continued)*

Item	Item No.	Description	
	61363LF-H-PC	<ul style="list-style-type: none"> Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 9", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61363LF-H-PN		
	61363LF-H-SS		
	61363LF-H-BLGL		
	61363LF-H-GL		
Instant Hot Faucet with Angled Spout and Knurled Handle			



BEVERAGE FAUCETS *(for details on the Pristine™ Tankless Reverse Osmosis System, see pages 84-89)*



Item	Item No.	Description	
	61343LF-C-PC	<ul style="list-style-type: none"> DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain 	
	61343LF-C-PN		
	61343LF-C-SS		
	61343LF-C-BLGL		
	61343LF-C-GL		
Beverage Faucet with Arc Spout and Knurled Handle			

	61353LF-C-PC	<ul style="list-style-type: none"> DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain 	
	61353LF-C-PN		
	61353LF-C-SS		
	61353LF-C-BLGL		
	61353LF-C-GL		
Beverage Faucet with Square Spout and Knurled Handle			


	61363LF-C-PC	<ul style="list-style-type: none"> DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 11/16", spout to deck = 6 5/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain 	
	61363LF-C-PN		
	61363LF-C-SS		
	61363LF-C-BLGL		
	61363LF-C-GL		
Beverage Faucet with Angled Spout and Knurled Handle			

POT FILLERS

Item	Item No.	Description	
	62843LF-PC	<ul style="list-style-type: none">• Two handle wall mount• 1-hole installation• Cold water only• Spout reach = 23 1/4"• Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa	
	62843LF-PN		
	62843LF-SS		
	62843LF-BLGL		
	62843LF-GL		
Wall Mount Pot Filler Faucet with Knurled Handle			

	62844LF-PC	<ul style="list-style-type: none">• Two handle wall mount• 1-hole installation• Cold water only• Spout reach = 23 1/4"• Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa	
	62844LF-PN		
	62844LF-SS		
	62844LF-BLGL		
	62844LF-GL		
Wall Mount Pot Filler Faucet with Industrial Handle			


ACCESSORIES *(for kitchen drains and additional accessories, see pages 94-97)*

	RP90934PC	<ul style="list-style-type: none">• Includes installation hardware• Accommodates up to 3" deck thickness• 1/3" overall height	
	RP90934PN		
	RP90934SS		
	RP90934BL		
	RP90934GL		
Hole Cover			


ACCESSORIES *(continued) (for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 <p>VoiceIQ® Module</p>	EP100854	<ul style="list-style-type: none"> • VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines

HARDWARE

Item	Item No.	Description
 <p>Drawer Knob</p>	699235-PC 699235-PN 699235-NK 699235-BL 699235-SL 699235-GL	<ul style="list-style-type: none"> • Mounting hardware included • All metal construction

 <p>Drawer Pull</p>	699135-PC 699135-PN 699135-NK 699135-BL 699135-SL 699135-GL	<ul style="list-style-type: none"> • Mounting hardware included • All metal construction
--	--	--

 <p>Drawer Pull with Knurling</p>	699137-PC 699137-PN 699137-NK 699137-BLGL 699137-BLSL 699137-SL 699137-GL	<ul style="list-style-type: none"> • Mounting hardware included • All metal construction • 4 1/4" center to center distance
--	---	--





ODIN® KITCHEN COLLECTION

Both one and many.

In the Odin® Kitchen Collection by Brizo®, a singular aesthetic finds manifold expression. The streamlined silhouette takes on new distinction with each of seven finishes, while multiple handles and spout configurations add complexity and variety. Embodying both unity and diversity, the collection represents an exquisite multiplicity.

Available Finishes



POLISHED
CHROME
(PC)



BRILLIANCE®
POLISHED
NICKEL (PN)



BRILLIANCE®
STAINLESS
(SS)



MATTE
BLACK
(BL)



BRILLIANCE®
POLISHED GOLD
(PG)



BRILLIANCE®
LUXE STEEL®
(SL)



BRILLIANCE®
LUXE GOLD®
(GL)



MARINE-GRADE
STAINLESS
(SS-OD)



WOOD (WD)



CONCRETE (CT)



BLACK CRYSTAL
(BC)



MARBLE (MB)


Handle Accents

KITCHEN FAUCETS

Item

Item No.


Description



Semi Professional Kitchen
Faucet – Less Handle

63375LF-PCLHP
63375LF-PNLHP
63375LF-SSLHP
63375LF-BLLHP
63375LF-PGLHP
63375LF-SLLHP
63375LF-GLLHP


- DIAMOND Seal® Technology
- MagneDock® Technology – magnetic wand docking system
- Euro-motion Diamond™ Valve with InnoFlex™ waterways
- Touch-Clean® Nozzles – swipe away mineral deposits
- Two-function wand: spray and stream
- 1-hole installation
- Overall height = 22 13/16", spout outlet to deck = 9 1/16", spout reach = 9 2/16", spout swivels 360°
- Accommodates up to 3" deck thickness
- Finished, semi-flexible metal hose
- Comes with standard fittings
- Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa



SmartTouch® Semi Professional
Kitchen Faucet – Less Handle

64375LF-PCLHP
64375LF-PNLHP
64375LF-SSLHP
64375LF-BLLHP
64375LF-PGLHP
64375LF-SLLHP
64375LF-GLLHP


- SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light
- Optional A/C adapter EPI02157
- Optional voice activation technology (EPI00854) available for use with connected home devices
- For additional product details reference the non SmartTouch® Technology Model



Pull-Down Faucet with
Arc Spout – Less Handle

63075LF-PCLHP
63075LF-PNLHP
63075LF-SSLHP
63075LF-BLLHP
63075LF-PGLHP
63075LF-SLLHP
63075LF-GLLHP

- DIAMOND Seal® Technology
- MagneDock® Technology – magnetic docking system
- Euro-motion Diamond™ Valve with InnoFlex™ waterways
- Touch-Clean® nozzles – swipe away mineral deposits
- Two-function wand: spray and stream
- 1-hole installation
- Overall height = 16 9/16", spout outlet to deck = 9", spout reach = 8 5/8", spout swivels 360°
- Accommodates up to 3" deck thickness
- Comes with standard fittings
- Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa





SmartTouch® Pull-Down Faucet
with Arc Spout – Less Handle

64075LF-PCLHP
64075LF-PNLHP
64075LF-SSLHP
64075LF-BLLHP
64075LF-PGLHP
64075LF-SLLHP
64075LF-GLLHP


- SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light
- Optional A/C adapter EPI02157
- Optional voice activation technology (EPI00854) available for use with connected home devices
- For additional product details reference the non-SmartTouch® Technology model


KITCHEN FAUCETS *(continued)*


Item	Item No.	Description
	63065LF-PCLHP	<ul style="list-style-type: none"> • DIAMOND Seal® Technology • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14 5/8", spout outlet to deck = 9 1/16", spout reach = 8 15/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
	63065LF-PNLHP	
	63065LF-SSLHP	
	63065LF-BLLHP	
	63065LF-PGLHP	
	63065LF-SLLHP	
	63065LF-GLLHP	
Pull-Down Faucet with Square Spout – Less Handle		

	64065LF-PCLHP	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model
	64065LF-PNLHP	
	64065LF-SSLHP	
	64065LF-BLLHP	
	64065LF-PGLHP	
	64065LF-SLLHP	
	64065LF-GLLHP	
SmartTouch® Pull-Down Faucet with Square Spout – Less Handle		

PREP FAUCETS

Item	Item No.	Description
	63975LF-PCLHP	<ul style="list-style-type: none"> • DIAMOND Seal® Technology • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 12 7/8", spout outlet to deck = 6 13/16", spout reach = 7 1/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
	63975LF-PNLHP	
	63975LF-SSLHP	
	63975LF-BLLHP	
	63975LF-PGLHP	
	63975LF-SLLHP	
	63975LF-GLLHP	
Pull-Down Prep Faucet with Arc Spout – Less Handle		


	64975LF-PCLHP	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EP102157 • Optional voice activation technology (EP100854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model
	64975LF-PNLHP	
	64975LF-SSLHP	
	64975LF-BLLHP	
	64975LF-PGLHP	
	64975LF-SLLHP	
	64975LF-GLLHP	
SmartTouch® Pull-Down Prep Faucet with Arc Spout – Less Handle		



63965LF-PCLHP
63965LF-PNLHP
63965LF-SSLHP
63965LF-BLLHP
63965LF-PGLHP
63965LF-SLLHP
63965LF-GLLHP

Pull Down Prep Faucet with
Square Spout – Less Handle

- DIAMOND Seal® Technology
- MagneDock® Technology – magnetic docking system
- Euro-motion Diamond™ Valve with InnoFlex™ waterways
- Touch-Clean® nozzles – swipe away mineral deposits
- Two-function wand: spray and stream
- 1-hole installation
- Overall height = 12 1/8", spout outlet to deck = 6 5/8",
spout reach = 7 1/16", spout swivels 360°
- Accommodates up to 3" deck thickness
- Comes with standard fittings
- Maximum flow rate 1.8 gpm at 60 psi; 6.8L/min @ 414 kPa
- MUST ORDER HANDLE SEPARATELY





64965LF-PCLHP
64965LF-PNLHP
64965LF-SSLHP
64965LF-BLLHP
64965LF-PGLHP
64965LF-SLLHP
64965LF-GLLHP

SmartTouch® Pull Down
Prep Faucet with Square Spout –
Less Handle


- SmartTouch® Technology with TempID® feature – tap on/off
functionality with temperature indicating LED light
 - Optional A/C adapter EPI02157
- Optional voice activation technology (EPI00854) available for use with
connected home devices
- For additional product details reference the non-SmartTouch®
Technology model


HANDLE KITS: *Semi-Professional, Pull-Down, Articulating & Prep Faucets*

Item	Item No.	Item	Item No.	Description
	HLK175-PC HLK175-PN HLK175-SS HLK175-BL HLK175-PG HLK175-SL HLK175-GL		HLK177-PCWD HLK177-PNWD HLK177-SSWD HLK177-BLWD HLK177-PGWD HLK177-SLWD HLK177-GLWD	<ul style="list-style-type: none">• Lever Handles are ADA compliant• WD = Guyana Teak Wood• BC = Black Crystal• CT = Concrete• MB = Marble• Handle accents are derived from natural materials and will have unique variations in color and texture






BAR FAUCETS


Item	Item No.	Description
	61075LF-PCLHP	<ul style="list-style-type: none">• 1-hole installation• Ceramic cartridge• Overall height = 11 5/8", spout outlet to deck = 8 3/8", spout reach = 6", spout swivels 360°• Accommodates up to 2 1/2" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa• MUST ORDER HANDLE SEPARATELY
	61075LF-PNLHP	
	61075LF-SSLHP	
	61075LF-BLLHP	
	61075LF-PGLHP	
	61075LF-SLLHP	
	61075LF-GLLHP	
Bar Faucet with Arc Spout – Less Handle		

	61065LF-PCLHP	<ul style="list-style-type: none">• 1-hole installation• Ceramic cartridge• Overall height = 11 1/4", spout outlet to deck = 8 7/16", spout reach = 5 7/8", spout swivels 360°• Accommodates up to 2 1/2" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa• MUST ORDER HANDLE SEPARATELY
	61065LF-PNLHP	
	61065LF-SSLHP	
	61065LF-BLLHP	
	61065LF-PGLHP	
	61065LF-SLLHP	
	61065LF-GLLHP	
Bar Faucet with Square Spout – Less Handle		

HANDLE KITS: *Bar Faucets*


Item	Item No.	Item	Item No.	Description
	HLB175-PC		HLB177-PCWD	<ul style="list-style-type: none"> • Handles are ADA compliant • WD = Guyana Teak Wood • The nature of natural wood gives each wood piece a distinct texture and color
	HLB175-PN		HLB177-PNWD	
	HLB175-SS		HLB177-SSWD	
	HLB175-BL		HLB177-BLWD	
	HLB175-PG		HLB177-PGWD	
	HLB175-SL		HLB177-SLWD	
	HLB175-GL		HLB177-GLWD	
Metal Lever		Wood Lever		


POT FILLER

Item	Item No.	Description
 <p>Linear Wall Mount Pot Filler Faucet</p>	62820LF-PC	<ul style="list-style-type: none"> Two handle wall mount 1-hole installation Cold water only Spout reach = 23 1/4" Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa
	62820LF-PN	
	62820LF-SS	
	62820LF-BL	
	62820LF-PG	
	62820LF-SL	
	62820LF-GL	




ACCESSORIES *(for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 <p>Soap/Lotion Dispenser</p>	RP79275PG	<ul style="list-style-type: none"> Includes installation hardware Accommodates up to 3" deck thickness 2 3/4" overall height 15-ounce bottle Refillable from above the deck
	RP79275SL	



 <p>Optional Escutcheon</p>	RP71451PG	<ul style="list-style-type: none"> Includes installation hardware Accommodates up to 3" deck thickness 8" on center
	RP71451SL	

ACCESSORIES *(continued) (for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 Hole Cover	RP90934PC	<ul style="list-style-type: none"> Includes installation hardware Accommodates up to 3" deck thickness 1/3" overall height
	RP90934PN	
	RP90934SS	
	RP90934BL	
	RP90934PG	
	RP90934SL	
	RP90934GL	

 VoiceIQ® Module	EP100854	<ul style="list-style-type: none"> VoiceIQ® Technology for hands-free voice activation For use with SmartTouch® faucets manufactured after January 2018 Includes VoiceIQ® module, cable and 9 volt power supply Pairs with Amazon® Alexa® and Google® Assistant-enabled devices Metered and custom dispensing options Warm-up feature pre-heats the water to 95° Handwashing mode using CDC recommended guidelines
--	----------	---

HARDWARE

Item	Item No.	Description
 Drawer Knob	699275-PC	<ul style="list-style-type: none"> Mounting hardware included All metal construction
	699275-BL	
	699275-GL	
	699275-BN	
 Drawer Pull	699175-PC	<ul style="list-style-type: none"> Mounting hardware included All metal construction 3 3/4" center to center distance
	699175-BL	
	699175-GL	
	699175-BN	





JASON WU FOR BRIZO™ KITCHEN COLLECTION

The audacity of simplicity.

Sometimes, the simplest expression makes the loudest statement. Nowhere is that more evident than in the Jason Wu for Brizo™ Kitchen Collection. Its fresh, streamlined aesthetic breaks through the noise with stunning clarity—bringing new vibrance to the familiar.

Available Finishes



MATTE WHITE
(MW)



MATTE WHITE /
BRILLIANCE® POLISHED
NICKEL (MWPN)



BRILLIANCE® POLISHED
NICKEL / WOOD
(MWD)



BRILLIANCE®
POLISHED NICKEL
(MWPN)



CONCRETE
(CT)







BLACK CRYSTAL
(BC)




MARBLE
(MB)


Handle Accents

KITCHEN FAUCETS

Item	Item No.	Description
	63375LF-MWLHP 63375LF-MWPNLHP	<ul style="list-style-type: none">• MagneDock® Technology - magnetic wand docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles - swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 22 13/16", spout outlet to deck = 9 1/16", spout reach = 9 2/16", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Finished, semi-flexible metal hose• Maximum flow rate 1.8 gpm at 60 psi, 6.81 L/min @ 414 kPa• MUST ORDER HANDLE SEPARATELY
	64375LF-MWLHP 64375LF-MWPNLHP	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature - tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non SmartTouch® Technology Model
	63075LF-MWLHP	<ul style="list-style-type: none">• MagneDock® Technology - magnetic docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles - swipe away mineral deposits• Two-function pull-down wand: spray and stream• 1-hole installation• Overall height = 16 9/16", spout outlet to deck = 9", spout reach = 8 5/8", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa• MUST ORDER HANDLE SEPARATELY
	64075LF-MWLHP	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature - tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non-SmartTouch® Technology model


KITCHEN FAUCETS *(continued)*

Item	Item No.	Description
 <p>Pull-Down Faucet with Square Spout – Less Handle</p>	63065LF-MWLHP	<ul style="list-style-type: none"> • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function pull-down wand: spray and stream • 1-hole installation • Overall height = 14 5/8", spout outlet to deck = 9 1/16", spout reach = 8 15/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY

 <p>SmartTouch® Pull-Down Faucet with Square Spout – Less Handle</p>	64065LF-MWLHP	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model
---	---------------	---


PREP FAUCETS

Item	Item No.	Description
 <p>Pull-Down Prep Faucet with Arc Spout – Less Handle</p>	63975LF-MWLHP	<ul style="list-style-type: none"> • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 12 7/8", spout outlet to deck = 6 13/16", spout reach = 7 1/8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY



 <p>SmartTouch® Pull-Down Prep Faucet with Arc Spout – Less Handle</p>	64975LF-MWLHP	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional A/C adapter EPI02157 • Optional voice activation technology (EPI00854) available for use with connected home devices • For additional product details reference the non-SmartTouch® Technology model
---	---------------	---

PREP FAUCETS *(continued)*

Item	Item No.	Description
	63965LF-MWLHP	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 12 1/8", spout outlet to deck = 6 5/8", spout reach = 7 1/16", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa• MUST ORDER HANDLE SEPARATELY
Pull-Down Prep Faucet with Square Spout – Less Handle		


	64965LF-MWLHP	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices• For additional product details reference the non-SmartTouch® Technology model
SmartTouch® Pull-Down Prep Faucet with Square Spout – Less Handle		

HANDLE KITS: *Semi-Professional, Pull-Down, and Prep Faucets*




Item	Item No.	Item	Item No.	Description
	HLK175-MW HLK175-MWPN		HLK177-MWWD	<ul style="list-style-type: none">• Lever handles are ADA compliant• BC = Black Crystal• CT = Concrete• MB = Marble• MWWD = Guyana teak wood lever with Brilliance® Polished Nickel tip• Handle accents are derived from natural materials and will have unique variations in color and texture
Metal Lever		Wood Lever		

BAR FAUCETS

Item	Item No.	Description
 <p>Bar Faucet with Arc Spout – Less Handle</p>	61075LF-MWLHP	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 11 5/8", spout outlet to deck = 8 3/8", spout reach = 6", spout swivels 360° • Accommodates up to 2 1/2" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY

 <p>Bar Faucet with Square Spout – Less Handle</p>	61065LF-MWLHP	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 11 1/4", spout outlet to deck = 8 7/16", spout reach = 5 7/8", spout swivels 360° • Accommodates up to 2 1/2" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa • MUST ORDER HANDLE SEPARATELY
---	---------------	---

HANDLE KITS: *Bar Faucets*

Item	Item No.	Item	Item No.	Description
 <p>Metal Lever</p>	HLB175-MW HLB175-MWPN	 <p>Wood Lever</p>	HLB177-MWWD	<ul style="list-style-type: none"> • Handles are ADA compliant • MWWD = Guyana teak wood lever with Brilliance® Polished Nickel tip • The nature of natural wood gives each wood piece a distinct texture and color 



INSTANT HOT FAUCETS



Item	Item No.	Description
 <p>Instant Hot Faucet with Arc Spout</p>	61320LF-H-MW	<ul style="list-style-type: none"> • Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 1/16", spout to deck = 5 7/8", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 

INSTANT HOT FAUCETS *(continued)*



Item	Item No.	Description	
 Instant Hot Faucet with Square Spout	61365LF-H-MW	<ul style="list-style-type: none">Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY.Delivers near boiling water on demandSelf closing spring loaded ceramic disc valve cartridge1-hole installationOverall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360°Accommodates up to 3" deck thicknessMaximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa	

BEVERAGE FAUCETS *(for details on the Pristine™ Tankless Reverse Osmosis System, see pages 84-89)*


Item	Item No.	Description	
 Beverage Faucet with Arc Spout	61320LF-C-MW	<ul style="list-style-type: none">DIAMOND Seal® TechnologyCompatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap1-hole installationOverall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360°Accommodates up to 3" deck thicknessIntegrated supply tubesIntegrated air gap included with 1/4" tube for RO system and 3/8" tube for drainMaximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa	


 Beverage Faucet with Square Spout	61365LF-C-MW	<ul style="list-style-type: none">DIAMOND Seal® TechnologyCompatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap1-hole installationOverall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5", spout swivels 360°Accommodates up to 3" deck thicknessIntegrated supply tubesIntegrated air gap included with 1/4" tube for RO system and 3/8" tube for drainMaximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa	
--	--------------	--	---

POT FILLER

Item	Item No.	Description	
 Linear Wall Mount Pot Filler Faucet	62820LF-MW	<ul style="list-style-type: none">Two handle wall mount1-hole installationCold water onlySpout reach = 23 1/4"	

ACCESSORIES *(for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
	RP79275MW	<ul style="list-style-type: none">• Includes installation hardware• Accomodates up to 3" deck thickness• 2 3/4" overall height• 15-ounce bottle• Refillable from above the deck
Soap/Lotion Dispenser		

	EP100854	<ul style="list-style-type: none">• VoiceIQ® Technology for hands-free voice activation• For use with SmartTouch® faucets manufactured after January 2018• Includes VoiceIQ® module, cable and 9 volt power supply• Pairs with Amazon® Alexa® and Google® Assistant-enabled devices• Metered and custom dispensing options• Warm-up feature pre-heats the water to 95°• Handwashing mode using CDC recommended guidelines
VoiceIQ® Module		





ROOK® KITCHEN COLLECTION

A move ahead.

The Rook® Kitchen Collection by Brizo® exudes stately elegance at every turn. Its classic craftsman style is reminiscent of an early 20th century aesthetic, while contemporary, feminine touches elevate and modernize the look. Graceful curves complement precise angles, resulting in an exquisitely calculated balance.



Available Finishes



POLISHED CHROME
(PC)



BRILLIANCE®
POLISHED NICKEL
(PN)



BRILLIANCE®
STAINLESS (SS)



MATTE BLACK
(BL)



BRILLIANCE®
POLISHED GOLD
(PG)



BRILLIANCE®
LUXE GOLD®
(GL)





BRILLIANCE®
LUXE STEEL®
(SL)



KITCHEN FAUCETS

Item	Item No.	Description	
	63074LF-PC 63074LF-PN 63074LF-SS 63074LF-BL 63074LF-PG 63074LF-GL 63074LF-SL	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Euro-motion Diamond™ Valve with InnoFlex™ waterways• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 1-hole installation• Overall height = 15 7/8", spout outlet to deck = 8 5/8", spout reach = 8 7/8", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414kPa	



Pull Down Faucet

	64074LF-PC 64074LF-PN 64074LF-SS 64074LF-BL 64074LF-PG 64074LF-GL 64074LF-SL	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional A/C adapter EPI02157• Optional voice activation technology (EPI00854) available for use with connected home devices.• For additional product details reference the non-SmartTouch® Technology model	
---	--	---	---

SmartTouch® Pull Down Faucet

	62274LF-PC 62274LF-PN 62274LF-SS 62274LF-BL 62274LF-PG 62274LF-GL 62274LF-SL	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 2-hole installation• Dual-jointed articulating arm with semi-flexible hose allows for flexible placement and maneuverability• Overall height varies with arm position. Maximum height = 19 3/8", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa• Optional decorative center hole cover available RP90934	
---	--	--	---



Articulating Bridge Faucet

	62174LF-PC 62174LF-PN 62174LF-SS 62174LF-BL 62174LF-PG 62174LF-GL 62174LF-SL	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• 2-hole installation• Dual-jointed articulating arm with semi-flexible hose allows for flexible placement and maneuverability• Overall height varies with arm position. Maximum height = 19 3/8", maximum arm reach = 10 1/2", hose length = 23"; arm swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa• Optional decorative center hole cover available RP90934	
---	--	--	---



Articulating Bridge Faucet with Finished Hose

PREP FAUCETS

Item	Item No.	Description	
	63974LF-PC	<ul style="list-style-type: none"> • MagneDock® Technology – magnetic docking system • Euro-motion Diamond™ Valve with InnoFlex™ waterways • Touch-Clean® nozzles – swipe away mineral deposits • Two-function wand: spray and stream • 1-hole installation • Overall height = 14 5/16", spout outlet to deck = 7 3/8", spout reach = 8", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414kPa 	
	63974LF-PN		
	63974LF-SS		
	63974LF-BL		
	63974LF-PG		
	63974LF-GL		
	63974LF-SL		
Pull Down Prep Faucet			

	64974LF-PC	<ul style="list-style-type: none"> • SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light • Optional voice activation technology (EPI00854) available for use with connected home devices. • Optional A/C adapter EPI02157 • For additional product details reference the non-SmartTouch® Technology model 	
	64974LF-PN		
	64974LF-SS		
	64974LF-BL		
	64974LF-PG		
	64974LF-GL		
	64974LF-SL		
SmartTouch* Pull Down Prep Faucet			


BAR FAUCET

Item	Item No.	Description	
	61074LF-PC	<ul style="list-style-type: none"> • 1-hole installation • Ceramic cartridge • Overall height = 12 3/8", spout outlet to deck = 8 1/4", spout reach = 6 5/16", spout swivels 360° • Accommodates up to 3" deck thickness • Comes with standard fittings • Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414kPa 	
	61074LF-PN		
	61074LF-SS		
	61074LF-BL		
	61074LF-PG		
	61074LF-GL		
	61074LF-SL		
Bar Faucet			



INSTANT HOT FAUCET

Item	Item No.	Description	
	61374LF-H-PC	<ul style="list-style-type: none"> • Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO • Delivers near boiling water on demand • Self closing spring loaded ceramic disc valve cartridge • 1-hole installation • Overall height = 9 3/16", spout to deck = 5 15/16", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61374LF-H-PN		
	61374LF-H-SS		
	61374LF-H-BL		
	61374LF-H-PG		
	61374LF-H-GL		
	61374LF-H-SL		
Instant Hot Faucet			

BEVERAGE FAUCET *(for details on the Pristine™ Tankless Reverse Osmosis System, see pages 84–89)*


Item	Item No.	Description	
 <p>Beverage Faucet</p>	61374LF-C-PC	• DIAMOND Seal® Technology	
	61374LF-C-PN	• Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap	
	61374LF-C-SS	• 1-hole installation	
	61374LF-C-BL	• Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360°	
	61374LF-C-PG	• Accommodates up to 3" deck thickness	
	61374LF-C-GL	• Integrated supply tubes	
	61374LF-C-SL	• Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain	
		• Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 Kpa	


POT FILLER

Item	Item No.	Description	
 <p>Wall Mount Pot Filler Faucet</p>	62874LF-PC	• Two handle wall mount	
	62874LF-PN	• 1-hole installation	
	62874LF-SS	• Cold water only	
	62874LF-BL	• Spout reach = 23 1/4"	
	62874LF-PG	• Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa	
	62874LF-GL		
	62874LF-SL		


ACCESSORIES *(for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description	
 <p>Soap/Lotion Dispenser</p>	RP100487PC	• Includes installation hardware	
	RP100487PN	• Accommodates up to 3" deck thickness	
	RP100487SS	• 2 3/4" overall height	
	RP100487BL	• 15-ounce bottle	
	RP100487PG	• Refillable from above the deck	
	RP100487GL		
	RP100487SL		

 <p>Optional Escutcheon</p>	RP100299PC	• Includes installation hardware	
	RP100299BL	• Accommodates up to 3" deck thickness	
	RP100299PN	• 8" on center	
	RP100299SS		
	RP100299PG		
	RP100299GL		
	RP100299SL		

 <p>Hole Cover</p>	RP90934PG	• Includes installation hardware	
	RP90934SL	• Accommodates up to 3" deck thickness	
		• 1/3" overall height	

ACCESSORIES *(continued) (for kitchen drains and additional accessories, see pages 94-97)*

Item	Item No.	Description
 <p>VoiceIQ® Module</p>	EP100854	<ul style="list-style-type: none"> • VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines

HARDWARE

Item	Item No.	Description
 <p>Drawer Knob</p>	<p>699261-PC</p> <p>699261-PN</p> <p>699261-NK</p> <p>699261-NKBL</p> <p>699261-GL</p> <p>699261-RB</p>	<ul style="list-style-type: none"> • Mounting hardware included • All metal construction
 <p>Drawer Pull</p>	<p>699161-PC</p> <p>699161-PN</p> <p>699161-NK</p> <p>699161-NKBL</p> <p>699161-GL</p> <p>699161-RB</p>	<ul style="list-style-type: none"> • Mounting hardware included • All metal construction • 4" center to center distance





TULHAM™ KITCHEN COLLECTION

The spirit of reinvention.

Grandeur takes a playful turn in the Tulham™ Kitchen Collection. Elegant contours combine with art deco motifs for an inventive blend of the traditional and the avant-garde. From the tone-on-tone split finishes to the fluting details, the collection truly captures an artistic spirit.

Available Finishes



POLISHED CHROME
(PC)



BRILLIANCE®
POLISHED NICKEL
(PN)



BRILLIANCE®
STAINLESS (SS)



MATTE BLACK /
BRILLIANCE®
BLACK ONYX
(BLBNX)






BRILLIANCE®
LUXE GOLD® /
BRILLIANCE®
POLISHED GOLD
(GLPG)



BRILLIANCE®
LUXE STEEL®
(SL)

KITCHEN FAUCETS



Item	Item No.	Description	
	63058LF-PC	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• Euro-motion Diamond™ Valve with InnoFlex™ waterways• 1-hole installation• Overall height = 17 9/16", spout outlet to deck = 9 15/16", spout reach = 9", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm at 60 psi; 6.81 L/min @ 414 kPa	
	63058LF-PN		
	63058LF-SS		
	63058LF-BLBNX		
	63058LF-GLPG		
	63058LF-SL		
Pull-Down Kitchen Faucet			

	64058LF-PC	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EPI00854) available for use with connected home devices.• Optional A/C adapter EPI02157• For additional product details reference the non-SmartTouch® Technology model	
	64058LF-PN		
	64058LF-SS		
	64058LF-BLBNX		
	64058LF-GLPG		
	64058LF-SL		
SmartTouch® Pull Down Kitchen Faucet			



	62558LF-PC	<ul style="list-style-type: none">• Includes matching metal side sprayer• 3-hole installation• Solid brass one-piece waterway• Ceramic cartridges• Overall height = 15 13/16", spout outlet to deck = 10 7/16", spout reach = 8 1/4", spout swivels 360°• Accommodates up to 3" deck thickness• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa• Comes with standard fittings• Optional decorative center hole cover available RP90934	
	62558LF-PN		
	62558LF-SS		
	62558LF-BLBNX		
	62558LF-GLPG		
	62558LF-SL		
Bridge Kitchen Faucet with Side Spray			

PREP FAUCETS

Item	Item No.	Description	
	63958LF-PC	<ul style="list-style-type: none">• MagneDock® Technology – magnetic docking system• Touch-Clean® nozzles – swipe away mineral deposits• Two-function wand: spray and stream• Euro-motion Diamond™ Valve with InnoFlex™ waterways• 1-hole installation• Overall height = 16", spout outlet to deck = 8 11/16", spout reach = 8 1/16", spout swivels 360°• Accommodates up to 3" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa	
	63958LF-PN		
	63958LF-SS		
	63958LF-BLBNX		
	63958LF-GLPG		
	63958LF-SL		
Pull Down Prep Kitchen Faucet			

	64958LF-PC	<ul style="list-style-type: none">• SmartTouch® Technology with TempID® feature – tap on/off functionality with temperature indicating LED light• Optional voice activation technology (EP100854) available for use with connected home devices.• Optional A/C adapter EP102157• For additional product details reference the non-SmartTouch® Technology model	
	64958LF-PN		
	64958LF-SS		
	64958LF-BLBNX		
	64958LF-GLPG		
	64958LF-SL		
SmartTouch® Pull-Down Prep Kitchen Faucet			


BAR FAUCET

Item	Item No.	Description	
	61058LF-PC	<ul style="list-style-type: none">• 1-hole installation• Ceramic cartridge• Overall height = 12 3/8", spout outlet to deck = 8 1/16", spout reach = 6 3/8", spout swivels 360°• Accommodates up to 2 1/2" deck thickness• Comes with standard fittings• Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa	
	61058LF-PN		
	61058LF-SS		
	61058LF-BLBNX		
	61058LF-GLPG		
	61058LF-SL		
Bar Faucet			


INSTANT HOT FAUCET


Item	Item No.	Description	
	61358LF-H-PC	<ul style="list-style-type: none">Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY.Delivers near boiling water on demandSelf closing spring loaded ceramic disc valve cartridge1-hole installationOverall height = 9 7/16", spout to deck = 6 1/8", spout reach = 5 1/16", spout swivels 360°Accommodates up to 3" deck thicknessMaximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa	
	61358LF-H-PN		
	61358LF-H-SS		
	61358LF-H-BLBNX		
	61358LF-H-GLPG		
	61358LF-H-SL		
Instant Hot Faucet			

BEVERAGE FAUCET *(for details on the Pristine™ Tankless Reverse Osmosis System, see pages 84–89)*





Item	Item No.	Description	
	61358LF-C-PC	<ul style="list-style-type: none">• DIAMOND Seal® Technology• Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap• 1-hole installation• Overall height = 9 9/16", spout to deck = 6 1/8", spout reach = 5 1/16", spout swivels 360°"• Accommodates up to 3" deck thickness• Integrated supply tubes• Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain• Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa	
	61358LF-C-PN		
	61358LF-C-SS		
	61358LF-C-BLBNX		
	61358LF-C-GLPG		
	61358LF-C-SL		
Beverage Faucet			

POT FILLER

Item	Item No.	Description
	62858LF-PC	<ul style="list-style-type: none">• Two handle wall mount• 1-hole installation• Cold water only• Spout reach = 23 1/4"• Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa
	62858LF-PN	
	62858LF-SS	
	62858LF-BLBNX	
	62858LF-GLPG	
	62858LF-SL	
Wall Mount Pot Filler		



ACCESSORIES *(for kitchen drains and additional accessories, see pages 94–97)*

Item	Item No.	Description
 Soap/Lotion Dispenser	RP101658PC	<ul style="list-style-type: none"> • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
	RP101658PN	
	RP101658SS	
	RP101658BLBNX	
	RP101658GLPG	
	RP101658SL	
 Optional Escutcheon	RP101659PC	<ul style="list-style-type: none"> • Includes installation hardware • Accommodates up to 3" deck thickness • 8" on center
	RP101659PN	
	RP101659SS	
	RP101659BL	
	RP101659GL	
	RP101659SL	
 Hole Cover	RP90934PC	<ul style="list-style-type: none"> • Includes installation hardware • Accommodates up to 3" deck thickness • 1/3" overall height
	RP90934PN	
	RP90934SS	
	RP90934BL	
	RP90934GL	
	RP90934SL	
 VoiceIQ® Module	EP100854	<ul style="list-style-type: none"> • VoiceIQ® Technology for hands-free voice activation • For use with SmartTouch® faucets manufactured after January 2018 • Includes VoiceIQ® module, cable and 9 volt power supply • Pairs with Amazon® Alexa® and Google® Assistant-enabled devices • Metered and custom dispensing options • Warm-up feature pre-heats the water to 95° • Handwashing mode using CDC recommended guidelines





INSTANT HOT FAUCETS

Effortless harmony.







Brizo® Instant Hot faucets easily coordinate with any aesthetic, elevating the culinary experience with style and convenience. The near boiling water from the Instant Hot faucet is ready at a moment's notice—ideal for aromatherapy, steeping tea, brewing French press coffee and more.



Available Finishes



INSTANT HOT FAUCETS



Item	Item No.	Description	
 <p>Artesso® Instant Hot Faucet</p>	61325LF-H-PC	<ul style="list-style-type: none"> Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 9 3/8", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61325LF-H-PN		
	61325LF-H-SS		
	61325LF-H-BL		
	61325LF-H-GL		
	61325LF-H-RB		
 <p>Kintsu® Instant Hot Faucet with Arc Spout</p>	61306LF-H-PC-L	<ul style="list-style-type: none"> Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness L = Lumicoat® Technology Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61306LF-H-SS-L		
	61306LF-H-BL		
	61306LF-H-BNX-L		
	61306LF-H-GL-L		
 <p>Kintsu® Instant Hot Faucet with Square Spout</p>	61307LF-H-PC-L	<ul style="list-style-type: none"> Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness L = Lumicoat® Technology Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61307LF-H-SS-L		
	61307LF-H-BL		
	61307LF-H-BNX-L		
	61307LF-H-GL-L		

INSTANT HOT FAUCETS *(continued)*

Item	Item No.	Description	
 <p>Litze® Instant Hot Faucet with Arc Spout and Knurled Handle</p>	61343LF-H-PC	<ul style="list-style-type: none"> Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 9 1/16", spout to deck = 5 7/8", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61343LF-H-PN		
	61343LF-H-SS		
	61343LF-H-BLGL		
	61343LF-H-GL		
 <p>Litze® Instant Hot Faucet with Square Spout and Knurled Handle</p>	61353LF-H-PC	<ul style="list-style-type: none"> Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61353LF-H-PN		
	61353LF-H-SS		
	61353LF-H-BLGL		
	61353LF-H-GL		
 <p>Litze® Instant Hot Faucet with Angled Spout and Knurled Handle</p>	61363LF-H-PC	<ul style="list-style-type: none"> Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 9", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61363LF-H-PN		
	61363LF-H-SS		
	61363LF-H-BLGL		
	61363LF-H-GL		
 <p>Instant Hot Faucet with Arc Spout</p>	61320LF-H-PC	<ul style="list-style-type: none"> Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 9 1/16", spout to deck = 5 7/8", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61320LF-H-PN		
	61320LF-H-MW		
	61320LF-H-SS		
	61320LF-H-BL		
	61320LF-H-PG		
	61320LF-H-GL		
	61320LF-H-SL		
 <p>Instant Hot Faucet with Square Spout</p>	61365LF-H-PC	<ul style="list-style-type: none"> Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO. Delivers near boiling water on demand Self closing spring loaded ceramic disc valve cartridge 1-hole installation Overall height = 8 15/16", spout to deck = 6 3/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Maximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa 	
	61365LF-H-PN		
	61365LF-H-MW		
	61365LF-H-SS		
	61365LF-H-BL		
	61365LF-H-PG		
	61365LF-H-GL		
	61365LF-H-SL		

INSTANT HOT FAUCETS *(continued)*

Item	Item No.	Description
	61374LF-H-PC	<ul style="list-style-type: none">Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO.Delivers near boiling water on demandSelf closing spring loaded ceramic disc valve cartridge1-hole installationOverall height = 9 3/16" , spout to deck = 5 15/16", spout reach = 5 1/16", spout swivels 360°Accommodates up to 3" deck thicknessMaximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa
	61374LF-H-PN	
	61374LF-H-SS	
	61374LF-H-BL	
	61374LF-H-PG	
	61374LF-H-GL	
	61374LF-H-SL	
Rook® Instant Hot Faucet		

	61358LF-H-PC	<ul style="list-style-type: none">Engineered to pair with InSinkErator® HWT300-F3000S, HWT300-F2000S or HWT-300 tanks. TANK AND FILTER SOLD SEPARATELY. TANK AND FILTER NOT SOLD BY BRIZO.Delivers near boiling water on demandSelf closing spring loaded ceramic disc valve cartridge1-hole installationOverall height = 9 3/8", spout to deck = 6 3/16", spout reach = 5", spout swivels 360°Accommodates up to 3" deck thicknessMaximum flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa	
	61358LF-H-PN		
	61358LF-H-SS		
	61358LF-H-BLBNX		
	61358LF-H-GLPG		
	61358LF-H-SL		
Tulham™ Instant Hot Faucet			



PRISTIVE™ TANKLESS REVERSE OSMOSIS SYSTEM

Purer water beckons.

Harness the power of reverse osmosis for cleaner, fresher, and more sustainable water purification. The Pristive™ Tankless Reverse Osmosis System, including collection matching beverage faucets, reduces more than 90 contaminants from your drinking water, when tested against NSF standards.

Available Finishes



POLISHED
CHROME
(PC)



BRILLIANCE®
POLISHED
NICKEL (PN)



BRILLIANCE®
STAINLESS
(SS)



VENETIAN
BRONZE®
(RB)



MATTE
BLACK
(BL)



MATTE
WHITE
(MW)



BRILLIANCE®
BLACK ONYX
(BNX)



BRILLIANCE®
POLISHED
GOLD (PG)



BRILLIANCE®
LUXE GOLD®
(GL)



BRILLIANCE®
LUXE STEEL®
(SL)



BRILLIANCE®
LUXE GOLD® /
BRILLIANCE®
POLISHED GOLD
(GLPG)




MATTE BLACK /
BRILLIANCE®
BLACK ONYX
(BLBNX)



MATTE BLACK /
BRILLIANCE®
LUXE GOLD®
(BLGL)

PRISTIVE™ TANKLESS REVERSE OSMOSIS SYSTEM











Item	Item No.	Description
 Pristive™ Tankless Reverse Osmosis System	BWQ1001012	<ul style="list-style-type: none">• Multi-stage tankless reverse osmosis water filtration system• 800 GPD (0.56 GPM) production rate• Tankless under-sink installation and compact design• For cold water installations only• Requires AC power outlet• System pairs with any Brizo® beverage faucet with air gap, or refrigerator• System includes 3 filter cartridges: Reverse Osmosis Filter, Carbon Filter and Pre-Filter• Optional remineralizer cartridge available for enhanced taste and pH balance• 2.5:1 filtered-to-waste water ratio• Certified reduction of more than 90 contaminants from drinking water when tested against NSF standards, including: lead, total PFAS, arsenic, bacteria, virus, chlorine, chromium, copper, TDS, mercury, microplastics, pharmaceuticals, and heavy metals.• Tankless RO system provides a constant flow of water and wastes less water compared to tanked systems• The Pristive™ Tankless RO system is rigorously tested against numerous NSF standards• Low maintenance filtration system makes filter changes easy• Integrated filter life tracking and internal leak detection with audible alerts













PRISTIVE™ REMINERALIZER & FILTERS

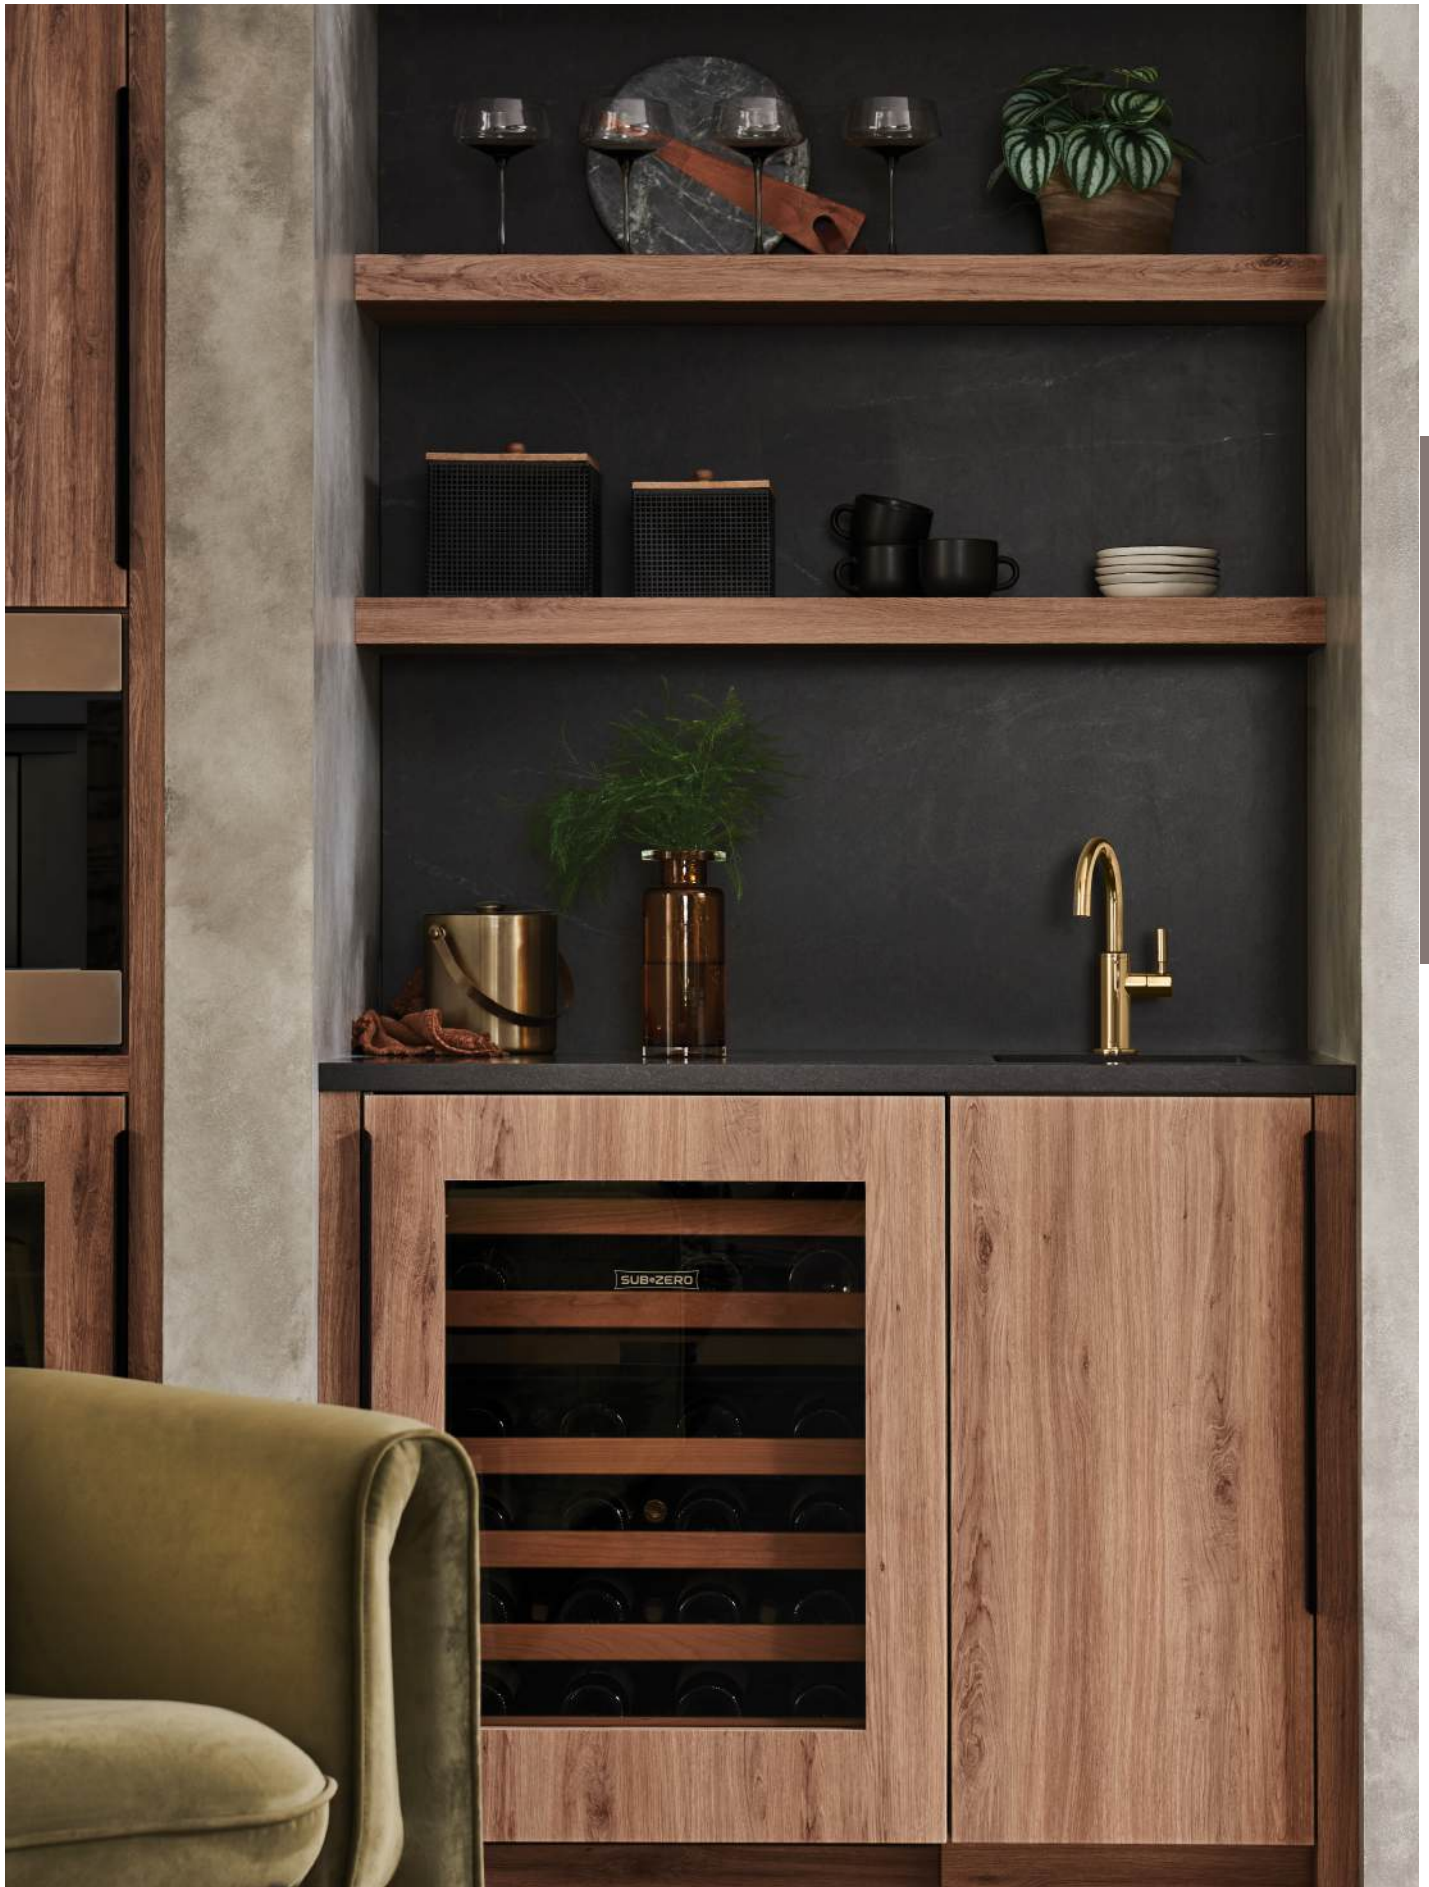
Item	Item No.	Description
 Pristive™ Remineralizer Cartridge	BWQ300300	<ul style="list-style-type: none">• Optional Remineralizer Cartridge to be used with Brizo RO system BWQ1001012• In-line installation• For cold water use only• Lifespan - 2 years or 1,320 gallons
 Pristive™ Reverse Osmosis Filter Cartridge	BWQ300102	<ul style="list-style-type: none">• Replacement filter for Brizo RO system BWQ1001012• Quick quarter turn installation• For cold water use only• Lifespan - 2 years or 1,320 gallons
 Pristive™ Carbon Filter Cartridge	BWQ300202	<ul style="list-style-type: none">• Replacement filter for Brizo RO system BWQ1001012• Quick quarter turn installation• For cold water use only• Lifespan - 2 years or 1,320 gallons
 Pristive™ Pre-Filter	BWQ300350	<ul style="list-style-type: none">• Replacement filter for Brizo RO system BWQ1001012• In-line installation• For cold water use only• Lifespan - 6 years or 3,960 gallons

BEVERAGE FAUCETS

Item	Item No.	Description	
 <p>Artesso® Beverage Faucet</p>	61325LF-C-PC	<ul style="list-style-type: none"> • DIAMOND Seal® Technology • Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
	61325LF-C-PN		
	61325LF-C-SS		
	61325LF-C-BL		
	61325LF-C-GL		
	61325LF-C-RB		
 <p>Litze® Beverage Faucet with Arc Spout and Knurled Handle</p>	61343LF-C-PC	<ul style="list-style-type: none"> • DIAMOND Seal® Technology • Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
	61343LF-C-PN		
	61343LF-C-SS		
	61343LF-C-BLGL		
	61343LF-C-GL		
 <p>Litze® Beverage Faucet with Square Spout and Knurled Handle</p>	61353LF-C-PC	<ul style="list-style-type: none"> • DIAMOND Seal® Technology • Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
	61353LF-C-PN		
	61353LF-C-SS		
	61353LF-C-BLGL		
	61353LF-C-GL		
 <p>Litze® Beverage Faucet with Angled Spout and Knurled Handle</p>	61363LF-C-PC	<ul style="list-style-type: none"> • DIAMOND Seal® Technology • Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 11/16", spout to deck = 6 5/16", spout reach = 5", spout swivels 360° • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
	61363LF-C-PN		
	61363LF-C-SS		
	61363LF-C-BLGL		
	61363LF-C-GL		
 <p>Kintsu® Beverage Faucet with Square Spout</p>	61307LF-C-PC-L	<ul style="list-style-type: none"> • DIAMOND Seal® Technology • Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap • 1-hole installation • Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5 1/16", spout swivels 360° • Accommodates up to 3" deck thickness • Integrated supply tubes • Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain • L = Lumicoat® Technology • Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
	61307LF-C-SS-L		
	61307LF-C-BL		
	61307LF-C-BNX-L		
	61307LF-C-GL-L		

BEVERAGE FAUCETS

Item	Item No.	Description	
 <p>Beverage Faucet with Arc Spout</p>	61320LF-C-PC 61320LF-C-PN 61320LF-C-MW 61320LF-C-SS 61320LF-C-BL 61320LF-C-PG 61320LF-C-GL 61320LF-C-SL	<ul style="list-style-type: none"> Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
 <p>Beverage Faucet with Square Spout</p>	61365LF-C-PC 61365LF-C-PN 61365LF-C-MW 61365LF-C-SS 61365LF-C-BL 61365LF-C-PG 61365LF-C-GL 61365LF-C-SL	<ul style="list-style-type: none"> Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
 <p>Rook® Beverage Faucet</p>	61374LF-C-PC 61374LF-C-PN 61374LF-C-SS 61374LF-C-BL 61374LF-C-PG 61374LF-C-GL 61374LF-C-SL	<ul style="list-style-type: none"> DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 1/2", spout to deck = 6 1/16", spout reach = 5 1/16", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 Kpa 	
 <p>Tulham™ Beverage Faucet</p>	61358LF-C-PC 61358LF-C-PN 61358LF-C-SS 61358LF-C-BLBNX 61358LF-C-GLPG 61358LF-C-SL	<ul style="list-style-type: none"> DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 9/16", spout to deck = 6 1/8", spout reach = 5 1/16", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	
 <p>Kintsu® Beverage Faucet with Arc Spout</p>	61306LF-C-PC-L 61306LF-C-SS-L 61306LF-C-BL 61306LF-C-BNX-L 61306LF-C-GL-L	<ul style="list-style-type: none"> DIAMOND Seal® Technology Compatible with the Pristine™ Tankless Reverse Osmosis System, filtered water systems, chillers, or as a cold water tap 1-hole installation Overall height = 9 7/16", spout to deck = 6 7/16", spout reach = 5 1/16", spout swivels 360° Accommodates up to 3" deck thickness Integrated supply tubes Integrated air gap included with 1/4" tube for RO system and 3/8" tube for drain L = Lumicoat® Technology Maximum flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa 	





POT FILLERS








The perfect complement.

For those seeking even more versatility and convenience, pot fillers are a superb addition to any culinary space and make it easy to fill large cooking vessels quickly—and without the walk from the sink to the stove. Brizo® Pot Fillers are available in a range of styles and finishes, ensuring a look that complements any décor or Brizo® collection.









Available Finishes

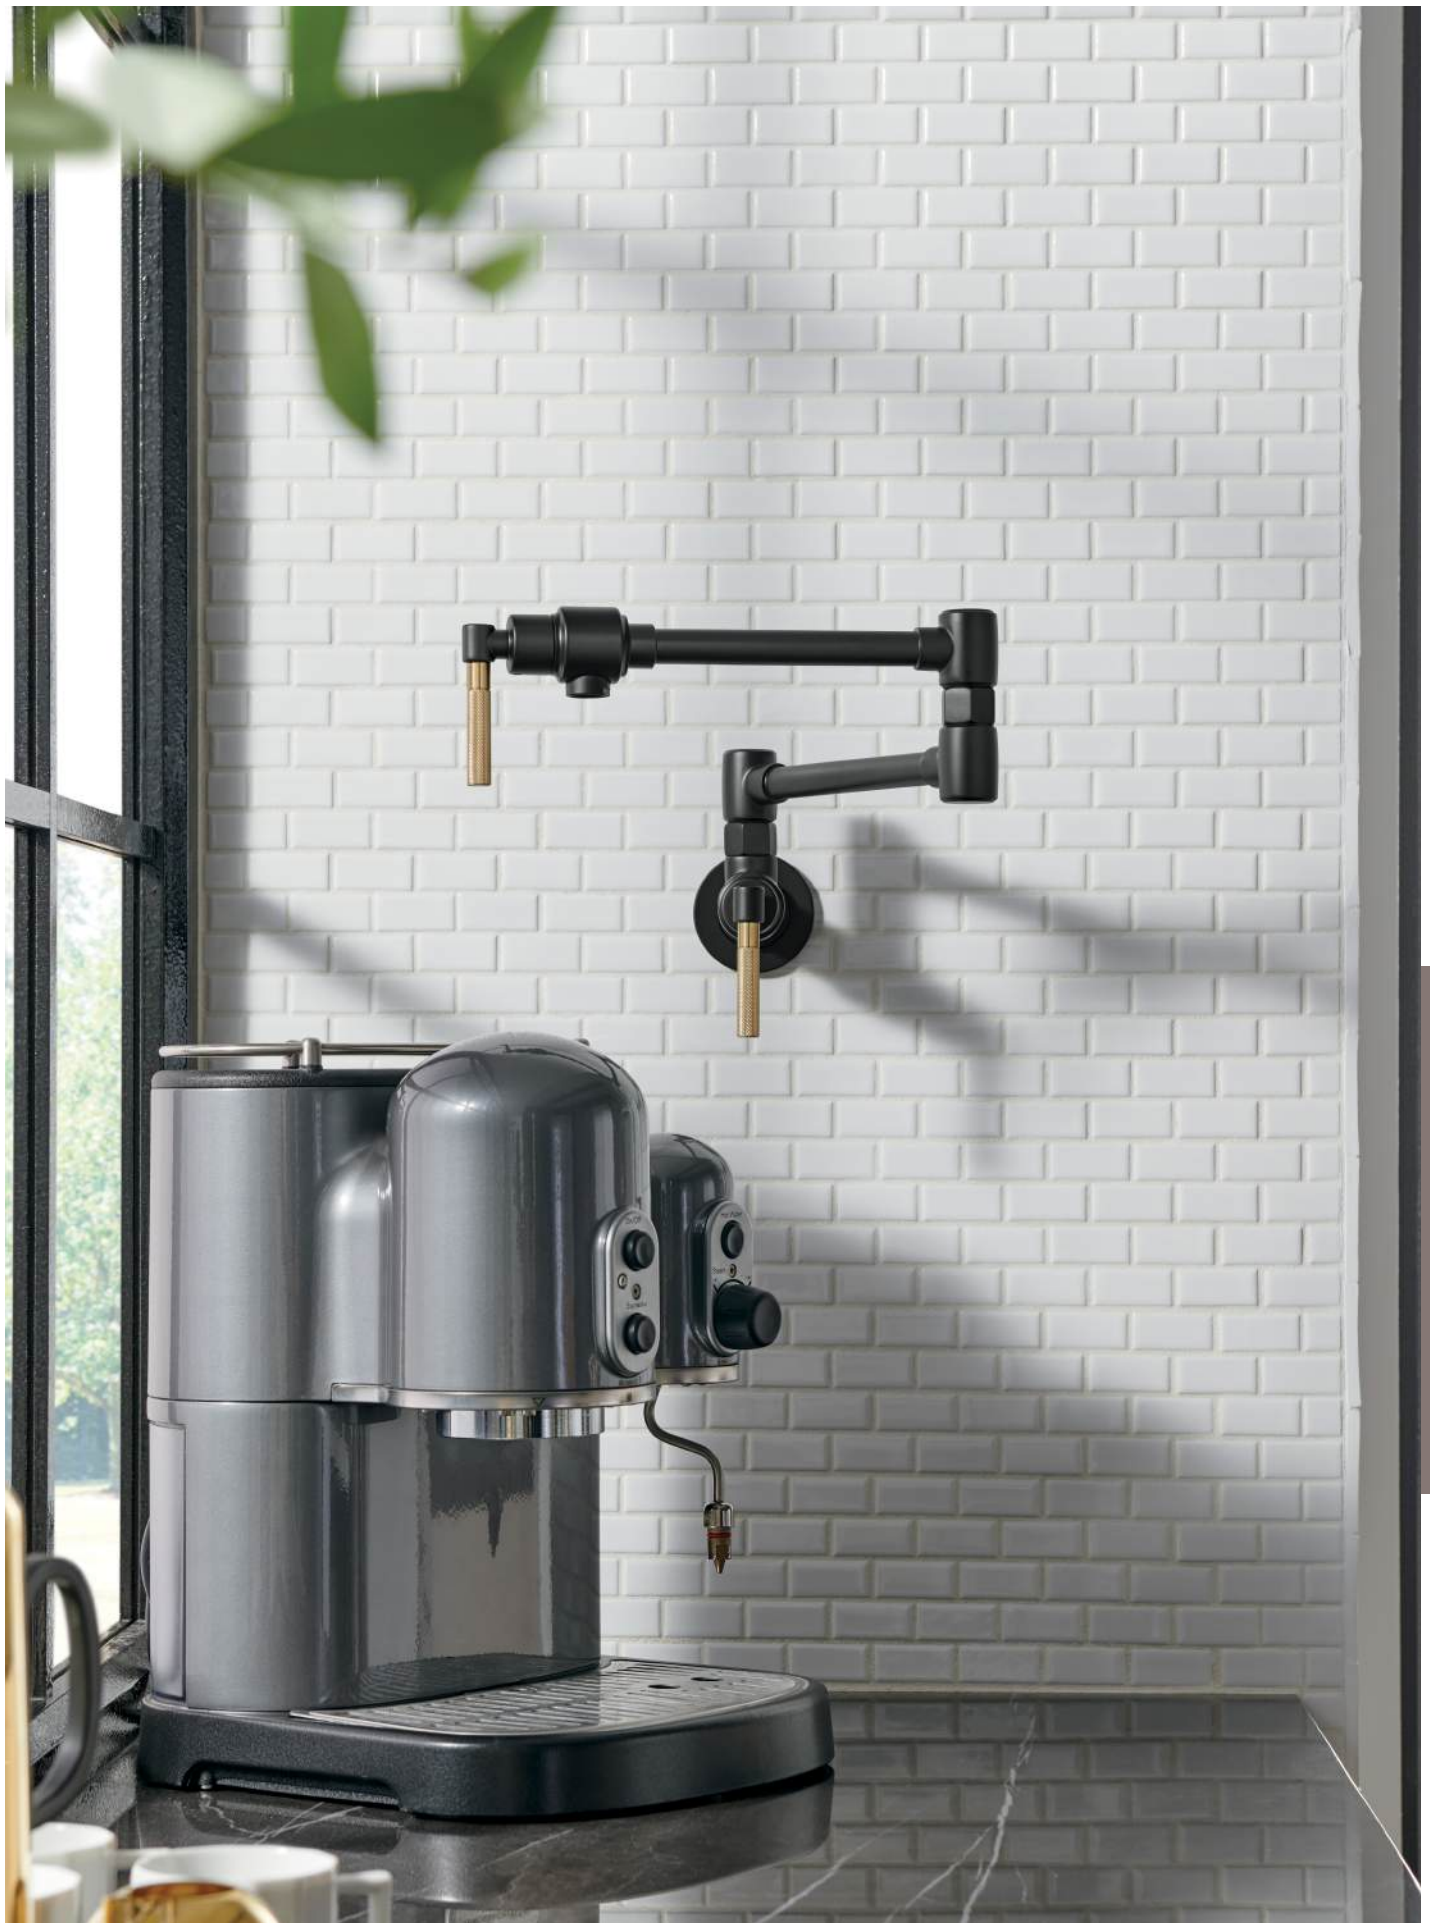


WALL MOUNT POT FILLER FAUCETS

Item	Item No.	Description	
 Artesso® Wall Mount Pot Filler Faucet	62825LF-PC	<ul style="list-style-type: none">• Two handle wall mount• 1-hole installation• Cold water only• Spout reach = 23 1/4"• Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa	
	62825LF-PN		
	62825LF-SS		
	62825LF-BL		
	62825LF-GL		
	62825LF-RB		
 Linear Wall Mount Pot Filler Faucet	62820LF-PC	<ul style="list-style-type: none">• Two handle wall mount• 1-hole installation• Cold water only• Spout reach = 23 1/4"• Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa• Coordinates with the Odin® and Jason Wu for Brizo™ kitchen collections	
	62820LF-PN		
	62820LF-MW		
	62820LF-SS		
	62820LF-BL		
	62820LF-PG		
	62820LF-GL		
	62820LF-SL		
	62820LF-RB		
 Kintsu® Wall Mount Pot Filler with Lever Handle	62806LF-PC-L	<ul style="list-style-type: none">• Two handle wall mount• 1-hole installation• Cold water only• L = Lumicoat® Technology• Spout reach = 20 1/2"• Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa	
	62806LF-SS-L		
	62806LF-BL		
	62806LF-BNX-L		
	62806LF-GL-L		
 Kintsu® Wall Mount Pot Filler with Knob Handle	62807LF-PC-L	<ul style="list-style-type: none">• Two handle wall mount• 1-hole installation• Cold water only• L = Lumicoat® Technology• Spout reach = 20 1/2"• Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa	
	62807LF-SS-L		
	62807LF-BL		
	62807LF-BNX-L		
	62807LF-GL-L		

WALL MOUNT POT FILLER FAUCETS *(continued)*

Item	Item No.	Description	
 <p>Litze® Wall Mount Pot Filler Faucet with Knurled Handle</p>	62843LF-PC	<ul style="list-style-type: none"> • Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa 	
	62843LF-PN		
	62843LF-SS		
	62843LF-BLGL		
	62843LF-GL		
 <p>Litze® Wall Mount Pot Filler Faucet with Industrial Handle</p>	62844LF-PC	<ul style="list-style-type: none"> • Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa 	
	62844LF-PN		
	62844LF-SS		
	62844LF-BLGL		
	62844LF-GL		
 <p>Rook® Wall Mount Pot Filler Faucet</p>	62874LF-PC	<ul style="list-style-type: none"> • Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa 	
	62874LF-PN		
	62874LF-SS		
	62874LF-BL		
	62874LF-PG		
	62874LF-GL		
	62874LF-SL		
 <p>Tulham™ Wall Mount Pot Filler Faucet</p>	62858LF-PC	<ul style="list-style-type: none"> • Two handle wall mount • 1-hole installation • Cold water only • Spout reach = 23 1/4" • Minimum flow rate 4.0 gpm @ 60 psi, 15.2 L/min @ 414 kPa 	
	62858LF-PN		
	62858LF-SS		
	62858LF-BLBNX		
	62858LF-GLPG		
	62858LF-SL		




KITCHEN ACCESSORIES

SOAP/LOTION DISPENSERS

Item	Item No.	Description
 <p>Soap/Lotion Dispenser</p>	RP75675PC RP75675PN RP75675SS RP75675BL RP75675GL RP75675RB	<ul style="list-style-type: none"> • Coordinates with the Artesso® kitchen collection • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 <p>Soap/Lotion Dispenser</p>	695306-PC-L 695306-SS-L 695306-BL 695306-BNX-L 695306-GL-L	<ul style="list-style-type: none"> • Coordinates with the Kintsu® kitchen collection • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck • L = Lumicoat® Technology
 <p>Soap/Lotion Dispenser</p>	RP79275PC RP79275PN RP79275BL RP79275MW RP79275SS RP79275PG RP79275SL RP79275GL	<ul style="list-style-type: none"> • Coordinates with the Litze®, Odin® and Jason Wu for Brizo™ kitchen collections • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
 <p>Soap/Lotion Dispenser</p>	RP100487PC RP100487PN RP100487SS RP100487BL RP100487PG RP100487GL RP100487SL	<ul style="list-style-type: none"> • Coordinates with the Rook® kitchen collection • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck


SOAP/LOTION DISPENSERS *(continued)*

Item	Item No.	Description
 <p>Soap/Lotion Dispenser</p>	RP101658PC	<ul style="list-style-type: none"> • Coordinates with the Tulham™ kitchen collection • Includes installation hardware • Accommodates up to 3" deck thickness • 2 3/4" overall height • 15-ounce bottle • Refillable from above the deck
	RP101658PN	
	RP101658SS	
	RP101658BLBNX	
	RP101658GLPG	
	RP101658SL	


HOLE COVERS

Item	Item No.	Description
 <p>Hole Cover</p>	RP90934PC	<ul style="list-style-type: none"> • Includes installation hardware • Accommodates up to 3" deck thickness • 1/3" overall height
	RP90934PN	
	RP90934BL	
	RP90934SS	
	RP90934PG	
	RP90934GL	
	RP90934SL	


AIR SWITCHES


Item	Item No.	Description
 <p>Air Switch</p>	69080-PC	<ul style="list-style-type: none"> • Dual outlet controller for waste disposal and one additional accessory • Brass button and trim with polyethylene body • Simple plug-in installation of control box • Installed in 1-1/4" openings • 6' flexible hose included
	69080-PN	
	69080-SS	
	69080-BL	
	69080-MW	
	69080-PG	
	69080-GL	
	69080-SL	
	69080-RB	


AIR GAPS


Item	Item No.	Description
 <p>Air Gap</p>	69060-PC	<ul style="list-style-type: none"> • Polyethylene body • 5/8" dishwasher inlet, 7/8" outlet • 1 7/8" diameter, 2 1/8" long brass cap
	69060-PN	
	69060-SS	
	69060-BL	
	69060-BNX	
	69060-PG	
	69060-GL	
	69060-SL	
	69060-RB	

KITCHEN DRAINS

Item	Item No.	Description
 <p>Flange with Strainer</p>	69052-PC	<ul style="list-style-type: none"> • Solid brass construction with stainless steel mounting hardware • Top-mount flange installation for 4 1/2" sink openings • 1 1/2" x 1 1/2" NPSM threads
	69052-PN	
	69052-SS	
	69052-PG	
	69052-BNX	
	69052-GL	
	69052-SL	

 <p>Disposal Flange with Stopper</p>	69070-PC	<ul style="list-style-type: none"> • Solid brass construction • Top-mount flange installation for 4 1/2" sink openings • Use with sink styles that require waste disposal to be installed up to 3/4" from sink opening
	69070-PN	
	69070-SS	
	69070-PG	
	69070-GL	
	69070-SL	

 <p>Disposal Flange with Stopper</p>	69072-PC	<ul style="list-style-type: none"> • Solid brass construction • Top-mount flange installation for 3 1/2" sink openings • Use with sink styles that require waste disposal to be installed between 3/4" to 1 1/2" from sink opening
	69072-PN	
	69072-SS	
	69072-PG	
	69072-BNX	
	69072-GL	
	69072-SL	

Item	Item No.	Description
 <p>VoiceIQ® Module</p>	EP100854	<ul style="list-style-type: none">• VoiceIQ® Technology for hands-free voice activation• For use with SmartTouch® faucets manufactured after January 2018• Includes VoiceIQ® module, cable and 9 volt power supply• Pairs with Amazon® Alexa® and Google® Assistant-enabled devices• Metered and custom dispensing options• Warm-up feature pre-heats the water to 95°• Handwashing mode using CDC recommended guidelines





📍 Oficinas Corporativas Artexa
Cañón Grande 7720, Col. La Estanzuela
Monterrey, N.L. 64984
T: (81) 8625 5000 info@artexa.com

📍 Artexa Experience & Design Center MTY
Av Lázaro Cárdenas 2424, Zona Loma
Larga Oriente C.P. 6626
Monterrey, N.L.

📍 Artexa Experience & Design Center Mexico City
Homero 1433 Mezzanine Col. Polanco II Secc.
Delegación Miguel Hidalgo, Ciudad de México 11540
T: (81) 8625 5090 / 5091 citas@artexa.com

📍 Taller de Arquitectura Artexa
Rubén Darío 1533 Piso 6B
Col. Providencia Sección 4
C.P. 44639 Guadalajara, Jalisco.



www.artexa.com



ArtexaMx



artexamx



Artexamex



ArtexaMx



artexamx



Artexa-mexico